

佛山市稻凯灯光科技有限公司

Foshan Daokai Lighting Technology Co., Ltd.

电话: +86-0757-85118610

邮箱: kevin@imrelax.com

公司网址: www.imrelax.com

地址: 广东省佛山市里水和顺袁屋边村东街八巷1号7楼厂房

ADD: 7th floor, NO.1 building, Eight lane, East street,
Yuanwubian village, Lishui 528241, Foshan, China



I M R E L A X

舞台灯配套设备

稻凯灯光 专业舞台灯光制造

Professional stage lighting manufacturer

CONTENTS目录

01

关于稻凯

ABOUT IMRELAX

稻凯灯光产品生产流程细节
Detail Production Process
Of Imrelax Lighting Products
技术证书
Technical Certificate
公司简介
Company Profile
工程案例
Engineering Case

PAGE 03-08

02

HID/LED摇头灯系列

HID/LED Moving Head
Light

IM-MH132
IM-MH230
IM-MH250
IM-MH311
IM-MH60B
IM-MH60S
IM-MH1915
IM-BEE1915
IM-MH1240
IM-MH3715
IM-MH90S
IM-LEDB150
IM-MH200M
IM-LED300
IM-LEDB300
IM-LED400

PAGE 09-24

03

LED效果灯系列

LED Effect Light

IM-SLRGBW540
IM-SLRGBW1080
IM-ELST600
IM-BL1812
IM-WL1403
IM-RL6H200MW
IM-RL8H200MW
IM-EL1040
IM-LB120

PAGE 25-32

04

户外防水灯系列

Outdoor
Waterproof Light

IM-PLWP5403
IM-BTWP1218
IM-PLWP1815
IM-WL4808
IM-SLW260
IM-SL260
IM-WPAL150
IM-WPAL02150
IM-MH350WP
IM-WPB600

PAGE 33-42

05

LED帕灯系列

LED Par Light

IM-SPAR5403
IM-PL1810
IM-PL5403
IM-PL5403UP
IM-PL0450
IM-PLCOB200
IM-AL02100
IM-AL04100

PAGE 43-46

06

LED影视灯系列

LED Studio Light

IM-SL60
IM-SL200
IM-LZPL200A

PAGE 47-48

07

舞台烟机系列

Stage FogMachine

IM-FM900
IM-FM1200
IM-FM1500
IM-HM900H
IM-HM1000
IM-WM3000

PAGE 49-52

08

控制台系列

DMX Console

DMX Console
IM-AC006
IM-DISCO240
IM-SUNNY512
IM-MINI PEARL
IM-Quartz
IM-Quartz Plus
IM-Touch Tiger
IM-Tiger2
IM-NPU
IM-MA2-P2
IM-MA2-P3

PAGE 53-60

09

配件系列

Accessories

IM-UTDMX01
IM-AC005
IM-AC018
IM-AC008
IM-AC009
IM-AC010
IM-AC014
IM-AC012
IM-AC013
IM-AC011
IM-AC020
IM-AC021
IM-AC022
IM-AC023
IM-AC026

PAGE 61-66

FOSHAN DAOKAI LIGHTING TECHNOLOGY CO., LTD.

(IMRELAX Stage Lighting) is a professional manufacturer and exporter specialized in research, design and development of stage lighting products over 10 years, we provide high quality products with lower price and outstanding customer service.

Our factory has 2 floors of manufacturing workshop, 12 production lines , 6 testing lines and 1 warehouse. All of our products comply with international quality & safety standards and have been being sold to all over the world.

IMRELAX is one of our most brands, our main products include: HID Moving Head Light, LED Moving Head Light, LED Studio light, LED Effect Light, LED Par Light, Laser Light, LED Display, Waterproof Stage Light, Stage Fog Machine etc.

佛山市稻凯灯光科技有限公司

佛山市稻凯灯光科技有限公司是一家专业从事舞台灯光产品的研发、生产和销售一体化的高新技术公司,凭信其雄厚的技术和实力得到欧美多个国家的支持,经过多年的努力成为国外舞台灯光行业影响力品牌之一。

佛山市稻凯灯光科技有限公司专业生产销售HID摇头灯、LED摇头灯、LED影视灯、LED效果灯、LED帕灯、户外防水舞台灯、舞台屏幕、烟机、控台等超过10年时间,作为舞台灯光行业专业制造商和出口商,我们以较低的价格提供优质的产品,并提供出色的客户服务,产品长期远销于欧美多个国家,拥有完整、科学的质量管理体系。

稻凯公司拥有2层生产车间,12条生产线1,6条检测线,1个仓库,所有的产品均符合国际质量和安全标准,并已销往世界各地多年。IMRELAX是我们的品牌之一,在中国和美国均已注册商标并获得相关的法律保护。


经营理念

多年以来,公司始终秉承“专注、分享价值”的经营理念,坚持“以发展为导向,以资源为核心,以人为根本;”的公司管理宗旨,致力于成为向社会提供优质产品、优质服务的公司楷模而努力!

COMPANY INTRODUCTION 公司介绍



工程案例

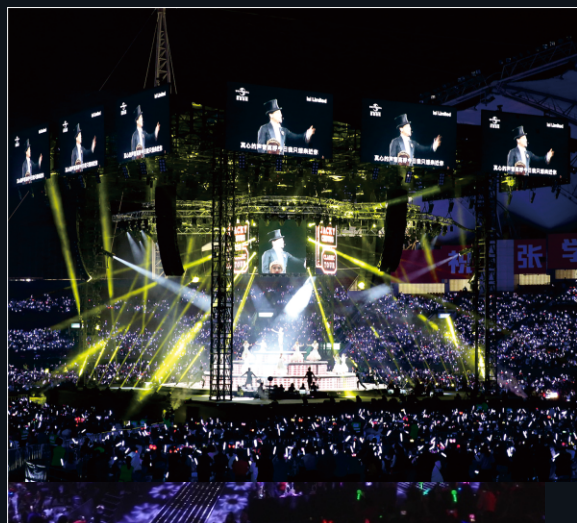

工程案例



优质光束132W光束2R摇头灯
Top Quality Sharpy Beam 132W Beam 2R Moving Head Light



技术参数 Technical Specification

电压：AC100–240v, 50 / 60Hz
功率：180W
光源：原装Yodn 2R灯泡
色盘：14色+白光
图案盘：15个固定图案
棱镜：8面棱镜
通道：16/20通道DMX–512
水平：540度/垂直：270度。
数据输入/输出：3针XLR连接，品字插座
外部尺寸：35×32×46.1cm
净重：9.5kg，毛重：11kg

Voltage: AC100–240v, 50/60Hz
Power: 180W
Lamp source: Original Yodn 2R Bulb
Color wheel: 14colors+open
Gobo wheel: 15 fixed gobos
Prism: 8 facet prism
Channels: 16/20 channel DMX–512
Pan: 540deg/tilt:270deg.
Data input/output: 3pin XLR–connection、anode socket
Outside size: 35×32×46.1cm
N.W.: 9.5kg, G.W.: 11kg



IM-MH132

产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压：AC90–260V, 50 / 60Hz;
功率：230W
光源：欧司朗7R 230W灯泡;
控制方式：DMX512 / 自走 / 主从 / 声控;
DMX频道：16 / 20CH;
水平扫描：540° (16bit) 电机校正;
垂直扫描：270° (16bit) 电机校正;
棱镜：16 + 8面棱镜;
显示方式：触摸液晶屏显示;
色轮：14色+白光;
图案片：17个图案片+空白;
频闪：13 t / s, 自由频闪和脉冲频闪;
毛重：18KG / pc;
尺寸：45 × 42 × 55cm / pc;

Voltage: AC90–260V,50/60Hz;
Power: 230W
Lamp Source: Osram bulb 7R 230W;
Control Mode: DMX512/Maser/Auto/Sound;
DMX Channel: 16/20CH;
Pan scan: 540° (16bit) Electric correction;
Tilt scan: 270° (16bit) Electric correction;
Prism: 16 + 8 facet prism;
Display: Touch Screen Display;
Color Wheel:14 Color + White;
Gobos: 17 gobos + white;
Strobe: 13 t/s, free strobe and Pulse strobe;
G.W: 18KG/pc;
Size: 45 × 42 × 55cm/pc;

产品灯光效果 Product lighting effect



IM-MH230

双棱镜夏普
光束230W 7R摇头灯

Double Prism Sharpy
Beam 230W 7R Moving Head Light



技术参数 Technical Specification

电压：AC100–240V， 50–60Hz
功率：300W
光源：飞利浦原装250W MSD银色灯泡
通道：16/18 DMX通道
镜头光学系统：超强力， 10米亮度400,000+ Lux！
水平：540度+精细
垂直：270度+精细
调光器：0–100%平滑线性调光器
频闪：1–25 Hz， 具有脉冲效果
色盘：14种颜色+开放式， 带6色彩虹效果轮；
图案盘：13个图案+打开
棱镜一：8面棱镜；
棱镜二：48面棱镜；
棱镜重叠：支持8 + 48面棱镜重叠
显示：触摸屏显示， 可调节180度以适应不同的安装位置
控制：DMX /主从/自动/声控
产品尺寸：38 × 40 × 53cm
装箱尺寸：40 × 42 × 55cm
净重：18kg
毛重：19kg

Voltage: AC100–240V,50–60Hz
Full load Power: 300W
Light source: Original Philips 250W MSD Silver Bulb
Channel: 16/18 DMX channel
Lens optical system: Super Powerful, 400,000+ Lux in 10 meters!
Pan: 540 degree + fine
Tilt: 270 degree + fine
Dimmer: 0–100% smooth linear dimmer
Strobe: 1–25 Hz with pulse effect
Color Wheel: 14 colors + open, with 6 color rainbow effect wheel;
Gobo Wheel: 13 gobos + open
Prism one: 8 facet prism;
Prism two: 48 facet prism;
Prism overlapping: 8+48 facet prism available
Display: Touch Screen display, can adjust 180 degree to fit different installation position
Control: DMX/Master–slave/Auto/Sound activated
Product Size:38 × 40 × 53cm
Packing Size: 40 × 42 × 55cm
N.W: 18kg
G.W: 19kg

产品灯光效果 Product lighting effect



IM-MH250

Monster Sharpy Beam
250W Moving
Head Light



技术参数 Technical Specification

电压：AC100–240V， 50–60Hz
功率：350W
光源：欧司朗原装SIRIUS HRI 311W灯泡
通道：16/18 DMX通道
镜头光学系统：超强力， 10米亮度700,000+ Lux！
水平：540度+精细
垂直：270度+精细
调光器：0–100%平滑线性调光器
频闪：1–25 Hz， 具有脉冲效果
色盘：14色+开放式， 带6色彩虹效果轮；
图案盘：13个图案+打开
棱镜一：8面棱镜；
棱镜二：48面棱镜；
棱镜重叠：支持8 + 48面棱镜重叠
显示：触摸屏显示， 可调节180度以适应不同的安装位置
控制：DMX /主从/自动/声控
产品尺寸：38 × 40 × 53cm
净重：21kg 毛重：23kg

Voltage: AC100–240V,50–60Hz
Full load Power: 350W
Light source: Original Osram SIRIUS HRI 311W Bulb
Channel: 16/18 DMX channel
Lens optical system: Super Powerful, 700,000+ Lux in 10 meters!
Pan: 540 degree + fine
Tilt: 270 degree + fine
Dimmer: 0–100% smooth linear dimmer
Strobe: 1–25 Hz with pulse effect
Color Wheel: 14 colors + open, with 6 color rainbow effect wheel;
Gobo Wheel: 13 gobos + open
Prism one: 8 facet prism;
Prism two: 48 facet prism;
Prism overlapping: 8+48 facet prism available
Display: Touch Screen display, can adjust 180 degree to fit different installation position
Control: DMX/Master–slave/Auto/Sound activated
Product Size:38 × 40 × 53cm
N.W: 21kg G.W: 23kg



IM-MH311

Master Sharpy Beam
311W Moving Head
Light



IM-MH60B

无极LED 60W光束摇头灯

Infinite LED 60W
Beam Moving
Head Light



产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压：AC90–240V, 50 / 60Hz

LED：60W RGBW 4合1 LED

消耗功率：130W

光束角：5度

水平：540° 或无限旋转

垂直：360° 或无限旋转

水平/垂直：水平/垂直反转选项

频闪：1–25次/秒或随机频闪

调光器：可变电子调光器（0–100%）

尖端环境温度：104° F（40° C）

显示屏：LCD显示屏

信号输入/输出：3pin XLR连接，阳极插座

控制模式：DMX512 / 主从/自走/声控

Voltage: AC90–240V, 50/60Hz

LED: 60W RGBW 4in1 LEDs

Power consumption: 130W

Beam angle: 5 degree

Pan: 540° or infinite rotate

Tilt: 360° or infinite rotate

Pan/tilt: Pan/tilt inverts option

Strobe: 1–25timesc or random strobe

Dimmer: Variable electronic dimmer(0–100%)

Tiptop environment temperature: 104° F(40° C)

Display: LCD Display Screen

Date input/output: 3pin XLR–connection、anode socket

Control mode: DMX512/Master–Slave/Auto run/Sound Active

IM-MH60S

迷你60W LED图案摇头灯

Mini 60W LED
SpotMoving
Head Light



产品灯光效果 Product lighting effect



技术参数 Technical Specification

输入功率：AC90–240V 50/60Hz

功率：90W

LED光源：60W白光LED

灯泡寿命：50000小时的寿命和低功耗

DMX通道：4/15通道

色轮：7种颜色+开启，彩虹

遮光罩轮：1个旋转遮光罩轮，7个玻璃遮光罩加开口

棱镜：三面棱镜

电动对焦

光束角：13°

机芯：水平540度，垂直210度

控制模式：自走，声控，DMX，主/从

红外遥控器：可选

显示方式：LCD显示

尺寸：195 × 190 × 290 mm

重量：4.5kg

Input power: AC90–240V 50/60 Hz

Power consumption: 90W

LED Source: 60W White LED

Lamp life : 50000 hours lamp lifespan and low consumption

DMX channel: 4/15 channels

Color wheel: 7 colors+open, rainbow

Gobo wheel: 1 rotating gobo wheel, 7 glass gobos plus open

Prism: 3–facet prism

Motorized focus

Beam angle: 13°

Movement : pan 540 degree , tilt 210 degree

Control mode: Auto, Sound, DMX, Master/Slave

IR remote control: optional

Display: LCD display

Dimension: 195 × 190 × 290 mm

Weight: 4.5kg

IM-MH1915

19* 15W RGBW ZOOM WASH

19* 15W RGBW LED调焦染色

19*15W RGBW

4in1 LED

Moving Head Light



产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压: AC100–240V, 50/60Hz

消耗功率: 300W

光源: 19* 15W大功率RGBW 4合1 LED灯珠

灯泡寿命: 100000h

色温: 2700–8000K可调

变焦角度: 5° –60°

混色: RGBW, 无限混色

频闪: 多种频闪模式可供选择, 32次/秒

DMX512通道: 13/24CH

调光器等级: 0–100%完美的线性调光器系统

XY: 540° / 270° , 自动准确定位

Wash + Zoom 2合1功能

防护等级: IP20, 在室内使用

控制模式: DMX512, 主从, 自走, 声控

包装尺寸: 480×315×395mm (1PC / CTN)

净重: 10kg 毛重: 12kg

Voltage: AC100–240V,50/60Hz

Consumption power: 300W

Light source: 19pcs * 15W high power RGBW 4in1 LEDs

Lamp lifespan: 100000h

Color temperature: 2700–8000K adjustable

Zoom angle: 5° – 60°

Color mixing: RGBW, lots of mixing color

Strobe: several strobe modes for choose, 32 timecond

DMX512 Channel: 13/24 CH

Dimmer grade: 0–100% perfect linear dimmer system

XY: 540° /270° , automatic accurate location

Wash+Zoom 2in1 function

Protection rating: IP20, used indoor

Control modes: DMX512, Master–slave, Auto–run and Sound control

Packing size: 480×315×395mm(1PC/CTN)

N.W: 10kg G.W:12kg

IM-BEE1915

大蜜蜂眼19* 15W变焦旋转摇头灯

Big Bee Eye 19*15W Zoom

Rotation Moving

Head Light



技术参数 Technical Specification

电压: AC100V–240V 50–60Hz

功率: 450W

LED光源: 19x15W大功率RGBW 4合1 LED灯珠

变焦: 4–60° 频闪: 0–20Hz

控制模式: DMX512, 主从, 自走, 声控

DMX通道: 21 CH / 23 CH / 35 CH / 78 CH / 92 CH / 97 CH / 99 CH

调光器: 0–100%线性调光器

水平: 540° + 16bit精细

垂直: 270° + 16bit精细

显示方式: 液晶彩色显示

灯具尺寸: 415×275×425 mm

纸箱包装尺寸: 53×42×51cm (1pcs / ctn)

净重: 14.95kg 毛重: 18.1kg

Voltage: AC100V ~ 240V 50–60Hz

Power: 450W

LED Source: 19x15W high power RGBW 4 in 1 LEDs

Zoom: 4–60° Strobe: 0–20Hz

Control Mode: DMX512,Sound–activated,Master/slave

DMX Channels: 21 CH/23 CH/35 CH/78 CH/92 CH/97 CH/99 CH

Dimmer: 0–100% linear dimmer

Pan: 540° +16bit fine

Tilt: 270° +16bit fine

Display: LCD colorful display

Fixture dimension: 415×275×425 mm

Carton package Size: 53×42×51cm (1pcs/ctn)

N.W:14.95 kg G.W: 18.1kg

技术参数 Technical Specification

输入电压：AC100–240 V，50/60 Hz
功率：500W
光源：12 * 40W欧司朗4合1 LED灯珠
色温：2800K–8500K
LED寿命：50,000小时
光束角：4.5–45度
控制模式：DMX512 /主从/自走/声控
整控DMX通道：12 / 17CH
点控DMX通道：11/17/18 / 58CHH
频闪：1–25Hz，随机和脉冲闪光
调光：0–100%线性电子调光
DMX信号进出：支持
电源进出：支持
水平/垂直：540/270°
水平/垂直分辨率：16位
调光器分辨率：16位

Input voltage: AC100–240 V,50/60 Hz
Power: 500W
Light Source: 12*40W Osram 4in1 LEDs
Color Temperature: 2800K–8500K
LED lifespan: 50,000 hours
Beam angle: 4.5–45 degrees
Control mode: DMX512/Master slave/Auto/Sound
Overall Control DMX channel: 12/17CH
Dot control DMX channel: 11/17/18/58CHH
Strobe: 1–25Hz, random and pulse flash
Dimming: 0–100% linear electronic dimmer
DMX in and out: Yes
Power in and out: Yes
Pan/Tilt: 540/270°
Pan/Tilt Resolution: 16 bit
Dimmer Resolution: 16 bit

产品灯光效果 Product lighting effect




IM-MH1240

12颗40W LED调焦
染色摇头灯
12*40W LED ZOOM Wash
Moving Head Light

技术参数 Technical Specification

电压：AC100–240V，50/60Hz
消耗功率：600W
光源：37*15W Osram RGBW 4合1 LED灯珠
灯泡寿命：100000H
色温：2700–8000K可调
变焦角度：5° –40°
混色：RGBW，无限混色
频闪：多种频闪模式可供选择，32次/秒
DMX512通道：24/48 CH
调光器等级：0–100%完美的线性调光器系统
XY：540° / 270°，自动准确定位
Wash + Zoom 2合1功能
防护等级：IP20，在室内使用
控制模式：DMX512，主从，自走，声控

产品灯光效果 Product lighting effect



IM-MH3715

37*15W完美变焦水洗
混色摇头灯
37*15W Perfect Zoom Wash
Color Mixed Moving Head Light



Voltage: AC100–240V,50/60Hz
Consumption power: 600W
Light source: 37pcs * 15W Osram RGBW 4in1 LEDs
Lamp lifespan: 100000H
Color temperature: 2700–8000K adjustable
Zoom angle: 5° – 40°
Color mixing: RGBW, lots of mixing color
Strobe: several strobe modes for choose, 32 timecond
DMX512 Channel: 24/48 CH
Dimmer grade: 0–100% perfect linear dimmer system
XY: 540° /270°，automatic accurate location
Wash+Zoom 2in1 function
Protection rating: IP20, used indoor
Control modes: DMX512, Master–slave, Auto–run and Sound control

技术参数 Technical Specification

光源：1pcs 90W白光LED灯珠
调光器：电子调光器0~100%
冷却：风扇冷却/强制对流
水平540° 垂直运动：270°
水平/垂直分辨率：8~16bit
棱镜：旋转三面棱镜
焦点：电线性聚焦从近到远
1个固定图案盘轮：8个图案盘并打开
1个旋转的图案盘轮：6个图案盘加开口，图案盘可旋转360°
1色轮：7色和白色
频闪：0~16Hz，从慢到快调节
控制模式：自走/声控/ DMX512 /主从
DMX通道：15个通道
尺寸：270 × 190 × 390mm
重量：7kg

Feature: Power In And Out.
Light source: 1pcs 90W white LED
Dimmer: Electronic dimmer 0~100%
Cooling: Fan Cooling / Forced convection
Pan movement: 540° Tilt movement: 270°
Pan/Tilt resolution: 8~16bit
Prism: rotating 3-facet prism
Focus: Electric linear focus from near to far
1 fixed gobo wheel: 8 gobos and open
1 rotated gobo wheel: 6 gobos plus open, gobo rotating 360°
1 color wheel: 7colors and open white
Strobe:0~16Hz, from slow to fast, adjusting
Control mode: Auto run/Sound active/DMX512/Master-Slave
DMX channel: 15 Channels
Size: 270 × 190 × 390mm
Weight: 7kg

产品灯光效果 Product lighting effect



IM-MH90S

90W LED图案摇头灯
90W LED Spot Moving Head Light



IM-LEDB150

150W LED光束摇头灯带圈控灯带

150W LED Beam Moving Head
Light with LED Light Strip



产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压：AC100~240V,50~60Hz
功率：150W
LED 光源：150W LED Module
色温：8000K
LED 寿命：50000 小时
通道：18个DMX通道
控制：DMX/主从/自动/声控
水平：540度+精细
垂直：270度+精细
对焦功能：支持
调光器：0~100%平滑线性调光器
频闪：1~25 Hz，带脉冲效果
色盘：14 种颜色 + 开放，带 1 个额外的彩虹色盘
图案盘：17个图案+开放
LED灯条：30颗LED灯珠，多种圈控效果，支持DMX控制
双棱镜：8棱镜+46棱镜，支持棱镜旋转
显示：液晶显示，可180度调节以适应不同的安装位置

Voltage: AC100~240V,50~60Hz
Power: 150W
Led source: 150W LED Module
Color Temperature: 8000K
LED Life Time: 50000 Hours
Channels: 18 DMX channel
Control: DMX/Master-slave/Auto/Sound activated
Pan: 540 degree + fine
Tilt: 270 degree + fine
Focus Funtion: Yes
Dimmer: 0~100% smooth linear dimmer
Strobe: 1~25 Hz with pulse effect
Color Wheel:14 colors + open, with 1pcs extral rainbow color wheel
Gobo Wheel:17 gobos + open
LED light strip: 30pcs LEDs, multi running effect, DMX control available
Double Prism: 8 facet prism + 46facet prism with bi-direction rotating
Display: LCD display, can adjust 180 degree to fit different installation position



IM-MH200M

200W LED光束点洗三合一摇头灯
加ZOOM功能

200W LED Beam Spot Wash 3in1 Moving
Head Light Plus ZOOM Feature



产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压：AC100–240V，50–60Hz	Voltage: AC100–240V,50–60Hz
功率：300W	Power: 300W
LED光源：200W白光LED	Led source: 200W White LED
使用寿命：平均50000小时	Led Life Time: Avereage 50000 Hours
通道：18 DMX通道	Channel: 18 DMX channel
控制：DMX /主从/自动/声控	Control: DMX/Master–slave/Auto/Sound activated
水平：540度+精细 垂直：270度+精细	Pan: 540 degree + fine Tilt: 270 degree + fine
变焦（光束）角度：7–21°	Zoom(Beam) angle: 7–21°
调光器：0–100%平滑线性调光器	Dimmer: 0–100% smooth linear dimmer
频闪：1–25 Hz，具有脉冲效果	Strobe: 1–25 Hz with pulse effect
色盘：9种颜色+开放式，具有半色效果	Color Wheel: 9 colors + open, with half color effect
静态图案盘：9个图案盘+打开，具有旋转和流水效果	Static Gobo Wheel: 9 gobos + open, with rotation and running water effect
旋转图案盘轮：7个图案盘+打开	Rotation gobo wheel: 7 gobos+open
棱镜：双向旋转的4面棱镜	Prism: 4 facet prism with bi–direction rotating
雾化：具有雾化效果	Frost: With frost effect
屏幕：中英文液晶屏，可调节180度以适应不同的安装位置	Screen: LCD screen with Chinese and English, can adjust 180 degree to fit different installation position
尺寸：343×239×537mm	Size of Dimension:343×239×537mm
包装尺寸：460×460×580mm (1PC / CTN)	Packing Dimension: 460×460×580mm(1PC/CTN)
净重：19kg 毛重：22kg	Net Weight: 19kg Gross Weight: 22kg

光束聚光变焦LED 300W摇头灯

Beam Spot Zoom LED
300W Moving Head Light

产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压：AC100–240V，50–60Hz	Voltage: AC100–240V,50–60Hz
功率：300W	Power: 300W
LED光源：280W白光LED灯珠	Led source: 280W White LED
色温：8000K	Color Temperature: 8000K
使用寿命：50000小时	Led Life Time: 50000 Hours
通道：18 DMX通道	Channel: 18 DMX channel
控制：DMX /主从/自动/声控	Control: DMX/Master–slave/Auto/Sound activated
水平：540度+精细 垂直：270度+精细	Pan: 540 degree + fine Tilt: 270 degree + fine
变焦范围：7–21度	Zoom range: 7–21 degree
调光器：0–100%平滑线性调光器	Dimmer: 0–100% smooth linear dimmer
频闪：1–25 Hz，具有脉冲效果	Strobe: 1–25 Hz with pulse effect
色盘：9种颜色+开放式，具有彩虹效果	Color Wheel: 9 colors + open, with rainbow effect
静态图案盘：10个图案盘+打开，具有旋转和自来水效果	Static Gobo Wheel: 10 gobos + open, with rotation and running water effect
旋转图案盘：7个图案盘+打开	Rotation gobo wheel: 7 gobos+open
双棱镜：4面棱镜+ 6面棱镜，双向旋转	Double Prism: 4 facet prism + 6 facet prism with bi–direction rotating
显示屏：液晶显示屏，可调节180度以适应不同的安装位置	Display: LCD display, can adjust 180 degree to fit different installation position
产品尺寸：343×232×537mm	Product size: 343times232times537mm
净重：15kg 毛重：18kg	N.W: 15kg G.W: 18kg

IM-LED300



电压：AC100–240V,50–60Hz	Voltage: AC100–240V,50–60Hz
功率：300W	Power: 300W
Led source: 280W White LED	Led source: 280W White LED
Color Temperature: 8000K	Color Temperature: 8000K
Led Life Time: 50000 Hours	Led Life Time: 50000 Hours
Channel: 18 DMX channel	Channel: 18 DMX channel
Control: DMX/Master–slave/Auto/Sound activated	Control: DMX/Master–slave/Auto/Sound activated
Pan: 540 degree + fine	Pan: 540 degree + fine
Tilt: 270 degree + fine	Tilt: 270 degree + fine
Zoom range: 7–21 degree	Zoom range: 7–21 degree
Dimmer: 0–100% smooth linear dimmer	Dimmer: 0–100% smooth linear dimmer
Strobe: 1–25 Hz with pulse effect	Strobe: 1–25 Hz with pulse effect
Color Wheel: 9 colors + open, with rainbow effect	Color Wheel: 9 colors + open, with rainbow effect
Static Gobo Wheel: 10 gobos + open, with rotation and running water effect	Static Gobo Wheel: 10 gobos + open, with rotation and running water effect
Rotation gobo wheel: 7 gobos+open	Rotation gobo wheel: 7 gobos+open
Double Prism: 4 facet prism + 6 facet prism with bi–direction rotating	Double Prism: 4 facet prism + 6 facet prism with bi–direction rotating
Display: LCD display, can adjust 180 degree to fit different installation position	Display: LCD display, can adjust 180 degree to fit different installation position
Product size: 343times232times537mm	Product size: 343times232times537mm
N.W: 15kg G.W: 18kg	N.W: 15kg G.W: 18kg

技术参数 Technical Specification

电压：AC100–240V,50–60Hz
功率：300W
LED 光源：300W LED Module
色温：8000K
LED 寿命：50000 小时
通道：16个DMX通道
控制模式：DMX/主从/自走/声控
水平：540度+精细
垂直：270度+精细
对焦功能：支持
调光器：0–100%平滑线性调光器
频闪：1–25 Hz，带脉冲效果
色盘：14 种颜色 + 开放，带 1 个单独的彩虹色盘
图案盘：17个图案+开放
两个独立棱镜：8棱镜+24棱镜，支持棱镜旋转
显示：液晶显示，可180度调节以适应不同的安装位置

Voltage: AC100–240V,50–60Hz
Power: 300W
Led source: 300W LED Module
Color Temperature: 8000K
LED Life Time: 50000 Hours
Channels: 16 DMX channel
Control: DMX/Master–slave/Auto/Sound activated
Pan: 540 degree + fine
Tilt: 270 degree + fine
Focus Funtion: Yes
Dimmer: 0–100% smooth linear dimmer
Strobe: 1–25 Hz with pulse effect
Color Wheel:14 colors + open, with 1pcs extral rainbow color wheel
Gobo Wheel:17 gobos + open
Two Prism wheels: 8 facet prism + 24 facet prism
Display: LCD display, can adjust 180 degree to fit different installation position

产品灯光效果 Product lighting effect



IM-LEDB300

300W LED光束摇头灯
300W LED Beam Moving Head Light



IM-LED400

400W LED光束图案染色调焦
摇头灯带CMY和CTO功能

400W LED Beam Spot Wash Zoom
Moving Head Light with CMY and CTO



技术参数 Technical Specification

电压：AC100–240V,50–60Hz
功率：400W
LED 光源：400W LED Module
色温：8000K
LED 寿命：50000 小时
通道：23个DMX通道
控制：DMX/主从/自走/声控
水平：540度+精细
垂直：270度+精细
对焦功能：支持
调光器：0–100%平滑线性调光器
频闪：1–25 Hz，带脉冲效果
色盘：9色+空白，带CTO颜色
CMY 彩色玻璃：支持，单独 DMX 控制
静态图案盘：12个图案+开放
旋转眼镜图案盘：7个图案+开放
变焦角度：7–42度
两个棱镜轮：4面线性棱镜+4面圆棱镜
显示：触摸屏，可180度调节以适应不同的安装位置

Voltage: AC100–240V,50–60Hz
Power: 400W
Led source: 400W LED Module
Color Temperature: 8000K
LED Life Time: 50000 Hours
Channels: 23 DMX channel
Control: DMX/Master–slave/Auto/Sound activated
Pan: 540 degree + fine
Tilt: 270 degree + fine
Focus Funtion: Yes
Dimmer: 0–100% smooth linear dimmer
Strobe: 1–25 Hz with pulse effect
Color Wheel: 9 colors + open, CTO color inside Color Wheel
CMY Color glass: available, individual DMX control
Static Gobo Wheel: 12 gobos + open
Rotation Glasses Gobo Wheel: 7 gobos + open
Zoom angle: 7–42 degree
Two Prism wheels: 4 facet Linear prism + 4 facet circle prism
Display: Touch Screen, can adjust 180 degree to fit different installation position




540颗0.5W RGBW LED迪斯科频闪灯

540pcs 0.5W RGBW LED Disco Strobe Light

IM-SLRGBW540

产品灯光效果 Product lighting effect

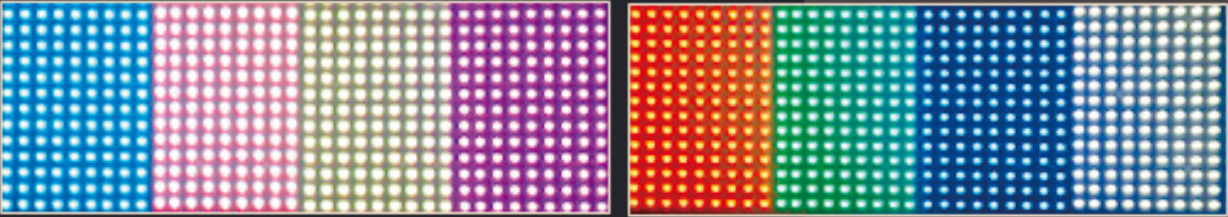

技术参数 Technical Specification

电压：AC100V-240V， 50 / 60Hz
功率：300W
光源：540 × 0.5W RGBW
寿命：80000小时
DMX通道：6/9/21通道
控制模式：DMX512模式，独立模式，主从模式
频闪：0-25次/秒
产品尺寸：470 × 170 × 170mm
净重：6kg 毛重：7kg

Voltage:AC100V-240V,50/60Hz
Consumption power: 300W
Light source: 540 × 0.5W RGBW
Life span: 80000 hours
DMX channel:6/9/21 channel
Control mode: DMX512 mode、Stand-alone mode、Mater-Slave mode
Strobe:0-25time/scond
Product measurement:470 × 170 × 170mm
N.W:6kg G.W:7kg



1080pcs 0.5W RGBW LED舞台频闪灯


1080pcs 0.5W RGBW LED Stage Strobe Light

IM-SLRGBW1080

技术参数 Technical Specification

电压：AC100V-240V， 50 / 60Hz
功率：600W
光源：1080 * 0.5W RGBW
寿命：80000小时
DMX通道：3/5/12/18/20/26通道
控制模式：DMX512模式/独立模式/从属模式
频闪：0-25次/秒

Voltage: AC100V-240V,50/60Hz
Consumption power: 600W
Light source: 1080*0.5W RGBW
Life span: 80000 hours
DMX channel: 3/5/12/18/20/26 channel
Control mode: DMX512 mode/Stand-alone mode/Mater-Slave mode
Strobe:0-25times / second

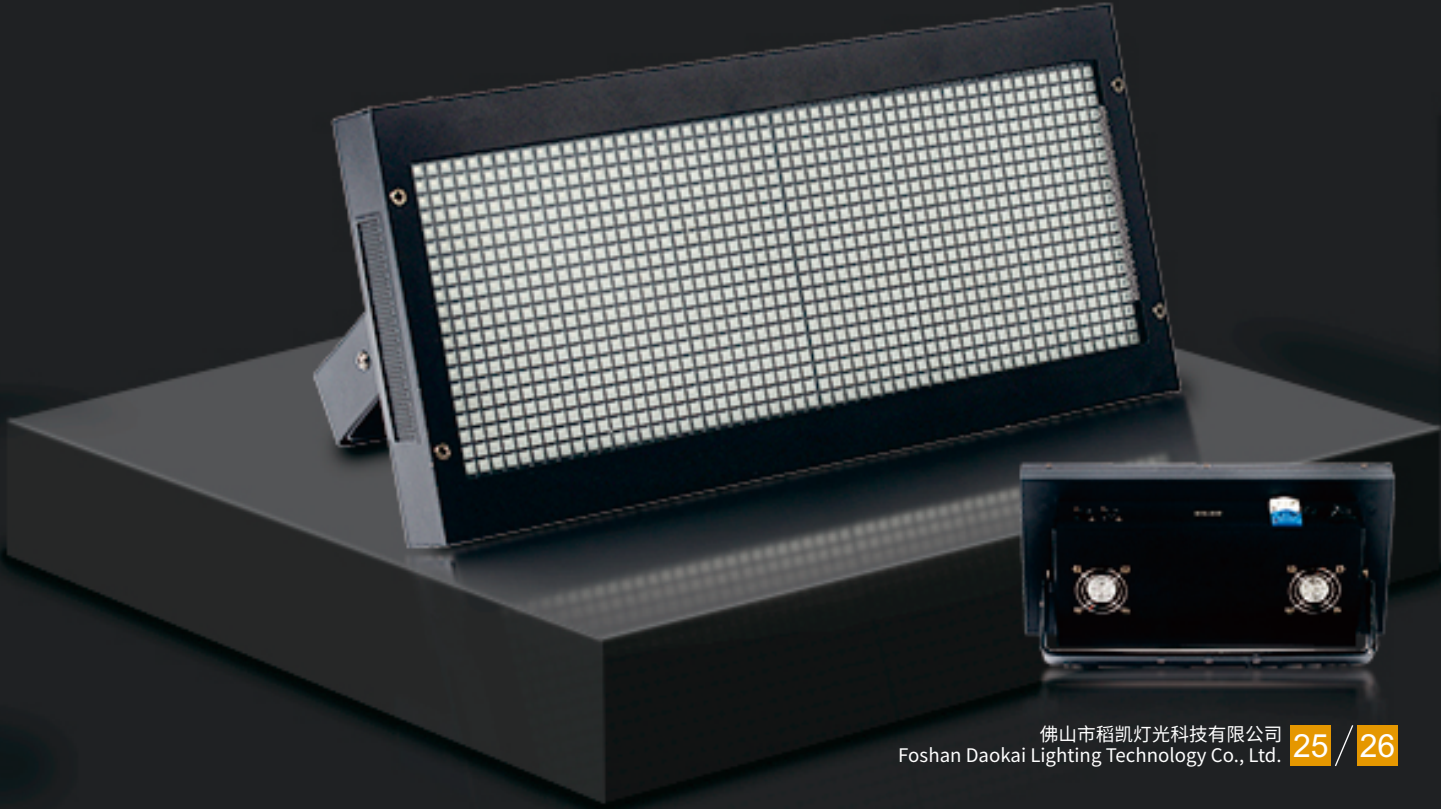


240pcs White LEDs and 480pcs RGB
LEDs Crazy Strobe Racing Bar Light
新款条形爆闪灯

IM-ELST600

技术参数 Technical Specification

电压: AC100~240V 50/60Hz
功率: 600W
灯珠: 240颗5W 7575 LEDs, 480颗0.3W RGB LEDs
控制方式: DMX、自动、主从、声控, 带RDM功能
通道: CH4、CH13、CH36、CH96、CH105、CH168
调光: 16bit 0~100% 线性调光
特点: 跑马效果+疯狂频闪
工作温度: -30度到50度
频闪频率: 1~30HZ
外观: 金属, 黑色外壳
DMX连接: DMX输入输出;
电源连接: 电源输入和输出;
防护等级: IP20
尺寸 (长*宽*高): 100×8×7cm
重量: 5KG

Voltage: AC 100~240V 50/60Hz
Power: 600W
Lamp beads: 240pcs 5W 7575 LEDs, 480pcs 0.3W RGB LEDs
Control mode: DMX, Auto, Master-slave, Sound control, with RDM function
Channels: CH4, CH13, CH36, CH96, CH105, CH168
Dimming: 16bit 0~100% linear dimming
Features: Racing Effect + Crazy Strobe
Working temperature: -30 degrees to 50 degrees
Strobe frequency: 1~30HZ
Appearance: Metal, Black Casing
DMX Connection: DMX in and out;
Power Connction: Power in and out;
IP rating: IP20
Size(L*W*H): 100×8×7cm
Weight: 5KG

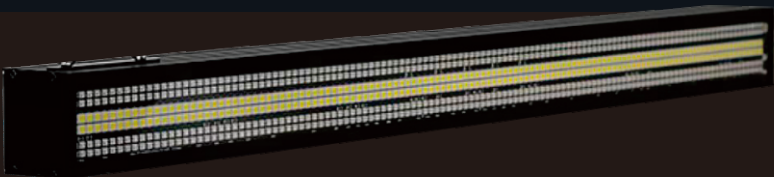

产品灯光效果 Product lighting effect



18*12W RGBWA+UV 6in1
LED Bar Light



产品灯光效果 Product lighting effect



技术参数 Technical Specification

输入电压: AC90~240V , 50 / 60Hz
光源: 18pcs * 12W 6in1 led RGBWA + UV
最大功耗: 216W, 所有RGBW led灯珠均打开
镜头角度: 25度
镜头直径: 42mm
协议: USITT DMX-512 / RDM
DMX-512通道: 4CH / 8CH
控制模式: 自走, 主/从, 声控, DMX-512, RDM
程序: 预设颜色, 自动追逐效果, 自动淡入淡出效果, 风俗
调光器模式: 16位和32位的0-100%线性平滑调光
散热方式: 兼具散热片和风扇的智能散热系统
净重: 5.5kg
产品尺寸: 1000×180×180mm

Input voltage: AC90~240V ,50/60Hz
Light source: 18pcs*12W 6in1 leds RGBWA+UV
Max power consumption: 216W with all RGBW leds turn on
Lens Angle: 25 degree
Lens diameter: 42mm
Protocol: USITT DMX-512 / RDM
DMX-512 Channel: 4CH /8CH
Operating Modes: Standalone, Master/Slave, Sound Active, DMX-512, RDM
Programs: Preset Colors, Auto Chase Effect, Auto Fade Effect, Customs
Dimmer Mode: 0-100% Linear Smooth Dimming of 16bit and 32bit
Cooling Method: Intelligent Cooling System with Heat Sink and Fan Both
Net Weight: 5.5kg
Product Dimension: 1000x×180×180mm

14 * 3W 多功能运行 效果LED洗墙灯

14*3W Muti Functional Running Effect LED Wall Wash Light

产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压: AC100 / 240V, 50 / 60Hz

功耗: 100W

光源: 外部120个RGB SMDS

中心14 * 3W Cree暖白光束

频闪140pcs冷白色光束

频闪: 0~16Hz, 从慢到快调节

电子调光器从0到100%

控制方式: DMX512 / 声控/自走/主从

LED数字显示

数据输入/输出: 3针XLR连接插座

Voltage: AC100/240V, 50/60Hz

Power consumption: 100W

Light source: outside 120pcs RGB SMDS

center 14*3W cree warm white beam

strobe 140pcs cool white beam

Strobe: 0~16Hz, from slow to fast, adjusting

Electronic dimmer from 0 to 100%

Control mode: DMX512/Sound/Auto/Master-slave

LED digital display

Data out/in: 3 pin XLR-connection sockets



IM-WL1403

200MW 6头红色激光束条形灯

200MW 6 Heads Red Laser Beam Bar Light

技术参数 Technical Specification

Rated Voltage: AC100V~230V 50~60Hz ± 10%

Rated Power: 150W

Laser Source: Semiconductor Pump Laser

Laser modulation: TTL

Laser wavelength: 638nm

Laser power: 1200mW (200mW*6PCS)

Laser color: RED

Laser system: Precision stepper motor scanning system, the Y-axis swings 180 degrees, and the X-axis laser head can swing.

Laser effect: Laser Skynet beam performance, laser flow line effect, laser strobe effect, LED beam sensation, water strobe, etc.

Control mode: DMX512/Sound/Auto/Master-slave

DMX channel: 17 Channels Selectable

Use environment: Indoor

Applicable places: bars, KTV, performing arts, dance halls, hotel banquet halls, entertainment venues, etc.

产品灯光效果 Product lighting effect



额定电压: AC100V~230V 50/60Hz ± 10%

额定功率: 150W

激光源: 半导体泵浦激光器

激光调制: TTL

激光波长: 638nm

激光功率: 1200mW (200mW * 6PCS)

激光颜色: 红色

激光系统: 精密步进电机扫描系统, Y轴可旋转180度, X轴激光头可旋转。

激光效果: 激光天窗光束性能, 激光流线效果, 激光频闪效果, LED光束感应, 水频闪等。

控制方式: DMX512 / 声控/自走/主从

DMX通道: 17个通道可选

使用环境: 室内

适用场所: 酒吧, KTV, 表演艺术, 歌舞厅, 酒店宴会厅, 娱乐场所等。

IM-RL6H200MW



200MW Red Laser 8 eyes Laser Beam Bar Light

技术参数

Technical Specification

额定电压：AC110V-220V 50/60Hz
功耗：100W
激光数量：8 pcs 200mW红色
通道：6/14通道
控制信号：DMX-512信号
控制方式：DMX512 /声控/自走/主从
运行环境：室内

产品灯光效果

Product lighting effect

Rated voltage: AC110V-220V 50/60Hz
Power consumption: 100W
Quantity of the Laser: 8 pcs 200mW Red
Channel: 6/14 channels
Control signal: DMX-512 signal
Control mode: DMX512/Sound/Auto/Master-slave
Operating environment: indoor

IM-RL8H200MW

200MW红色激光八眼 激光摇头灯



10×40W RGBW 4in1 LED 10颗光束摇头灯

10×40W RGBW 4in1 LED
Strong Beam Wash Bar Light

技术参数

Technical Specification

电压：AC90-240V 50-60Hz
功率：600W
灯珠：10×40W RGBW 4合1高亮度LED
通道：21CH/65CH
控制模式：DMX512 /声控/自走/主从
水平：270度
频闪：1-25 /秒或随机
显示屏：液晶屏
净重：13KG
尺寸：112×12×24cm

Voltage: AC90-240V 50-60Hz
Power: 600W
Lamp beads: 10×40W RGBW 4in1 High Brightness LEDs
Channel: 21CH/65CH
Control mode: DMX512/Sound/Auto/Master-slave
Tilt: 270 degrees
Strobe: 1-25/second or random
Display screen: LCD screen
Net weight: 13KG
Size: 112×12×24cm

IM-EL1040



产品灯光效果 Product lighting effect



Up Down 120W LED Lifting Ball

上下120W LED升降球

产品灯光效果 Product lighting effect



技术参数 Technical Specification

电压：AC100V-240V / 50-60Hz
总功率：120W
光源：3W×12pcs LED
调光：0-100%线性调光，具有16位精度微调
频闪：频闪速度每秒1-25次
吊重：3kg
线长：6 m（最长）
速度：每秒1米（最大）
通讯设计：DMX512，声控，自走（led球）
DMX512通道模式：10 ch
颜色：R，G，B线性无限颜色可选，可以进行线性变换和七彩彩虹效果
起重主机：35×29×16cm，重量：6.35kg；
球：直径25cm，重量：0.9kg（可选择25cm/ 30cm/ 35cm的球尺寸）

Voltage: AC100v-240V / 50-60Hz
Total power: 120W
Light source: 3W×12pcs LED
Dimming: 0-100% linear dimming, with 16-bit precision fine adjustment
Strobe: Strobe speed 1-25 times per second
Lifting weight: 3 kg
Cable length: 6 m (longest)
Speed: 1 meter per second (maximum)
Communication design: DMX512, sound control, automatic operation (led ball)
DMX512 channel mode: 10 ch
Color: R, G, B linear and unlimited colors are available, linear transformation and colorful rainbow effect can be performed
Lifting host: 35×29×16cm, weight: 6.35 kg;
Ball: diameter 25 cm, weight: 0.9 kg (can choose 25 cm / 30 cm / 35 cm ball size)



IM-LB120



Waterproof 54×3W RGBW LED Par Lights

54×3W RGBW LED
防水帕灯

技术参数 Technical Specification

电源：AC90V–240V，50/60Hz
功率：200W
灯泡：54颗3W RGBW LED
控制模式：DMX512 / 自走/声控/主从机
发光角度：25/45度
通道：4/7通道
包装纸箱尺寸：25 × 25 × 36cm
毛重：5KG/pc

Power supply: AC90V–240V, 50/60Hz
Power consumption: 200W
Lamp: 54pcs 3W RGBW LEDs
Control mode: DMX512/Auto/Sound/Master slave
Light angles: 25/45 degree
Channel: 4/7 Channels
Packing Carton size: 25 × 25 × 36cm
G.W: 5KG/pc



IM-BTWP1218

技术参数 Technical Specification

电源：AC100V–250V，50–60Hz
锂电池：10000MHA
功耗：220W
光源：12颗 × 18W RGBWA + UV 6合1 LED
防护等级：IP65
灯泡寿命：6–10个小时
LED角度：15 (± 5) 度
颜色：1670万种变色
控制通道：7/11通道
无线：内置2.4G接收器/发送器，用于无线DMX操作
控制模式：DMX512，无线DMX512，主/从，自动，声控
自动模式：变色，频闪，调光，渐变，跳变
支持IOS和Andriod电话控制和远程控制
毛重：7kg

Power supply: AC100V–250V, 50–60Hz
Lithium Battery: 10000MHA
Power consumption: 220W
Light source: 12pcs*18W RGBWA+UV 6in1 LEDs
IP Rate: IP65
Lamp life: 6–10 ten thousand hours
LED angle : 15(± 5) degree
Color: 16.7 million kinds of color change
Control channels: 7/11 Channels
Wireless: Built in 2.4G receiver/ transmitter for wireless DMX operations
Control mode : DMX512, wireless dmx512, master/slave, auto, sound active
Automatic model: Color change, strobe, dimmer, gradual change, jump change
Support IOS and Andriod phone control and Remote control
G.W: 7kg

产品灯光效果 Product lighting effect



无线电池防水12×18W

RGBWA + UV 6合1 LED帕灯

Wireless Battery Waterproof 12×18W RGBWA+UV 6in1

LED Par Can Light




IM-PLWP1815

技术参数 Technical Specification

电压: AC100V–240V, 50/60Hz
光源: 18颗15W RGBWA 5合1 LED
颜色: RGBWA混色。
IP防护等级: IP65
调光器: 可变电子调光器 (0–100%)。
频闪: 0–16Hz
颜色: 自动运行和颜色阴影。
控制模式: DMX512 /自走/声控/主从
DMX通道: 8个DMX通道
使用寿命为50000小时
最高温度: 104° F (40° C)
数据输入/输出: 3针XLR连接, 阳极插座
冷却: 对流
产品尺寸: 280 × 250 × 200mm
产品净重: 4.5kg

Voltage: AC100V–240V, 50/60Hz
Light source: 18pcs 15W RGBWA 5in1 LEDs
Color: RGBWA color mixing.
IP class: IP65
Dimmer: Variable electronic dimmer(0–100%).
Strobe: 0–16Hz
Color:auto–running and color shade.
Control Mode:DMX512/Auto/Sound/Master slave
DMX channels: 8 DMX channels
Life long is 50000 hours
Max temperature: 104° F(40° C)
Data input/output: 3pin XLR–connection, anode socket
Cooled: convection
Product size: 280 × 250 × 200mm
Product net weight: 4.5kg



Waterproof 18*15W RGBWA 5in1 LED Par Can Light

防水18 * 15W RGBWA 5合1 LED帕灯




48 × 8W RGBW 防水4合1 LED洗墙灯

48 × 8W RGBW Waterproof 4in1 LED Wash Light

技术参数 Technical Specification

输入电压: AC100V–240V, 50/ 60Hz
光源: 48 × 8W RGBW 4合1 LED
寿命: 50000–10000小时
调光器: 可变电子调光器 (0–100%)
冷却系统: 铝合金冷却系统
单控: 支持
控制模式: DMX512 /声控/自走/主从
通道: 8通道
显示: LED显示
程序: 带有内置程序

Input Voltage: AC100V–240V, 50/60Hz
Lamp resource: 48 × 8W RGBW 4in1 LED
Lifespan: 50000–10000 hours
Dimmer: Variable electronic dimmer(0–100%)
Cool Down System: Aluminum alloy Cooling System
Single control: Support
Control model: DMX512/Sound/Auto/Master–slave
Channel: 8 Channels
Display: LED display
Program: with build–in program



260W防水调焦双色COB LED面光灯

260W Waterproof ZOOM White and Warm
White COB LED Wash Par Light

技术参数 Technical Specification

电源: AC90V-240V, 50/60Hz
功耗: 300W
光源: 260W大功率COB LED灯珠
控制方式: DMX512/自走/声控/主从
通道: 6个DMX通道
颜色: CRI>95, 白和暖白双色
变焦角度: 线性变焦8-60度
调光: 0-100%电动调光
频闪: 1-25次/秒高速频闪, 单色或混色
使用寿命: 50,000 小时
防水等级: IP65

Power supply: AC90V-240V, 50/60Hz
Power consumption: 300W
Light source: 260W High Power COB LED
Control mode: DMX512/Auto/Sound/Master slave
Channel: 6 Channels
Color: CRI>95, white and warm white double color
Zoom Angle: Linear ZOOM 8-60 degree
Dimming: 0-100% electric dimmer
Strobe: 1-25 times/s high speed strobe, single color or mixed color
Lifespan: 50,000 hours
Waterproof rating: IP65



IM-SLW260



260W RGBW LED防水调焦LED面光灯

260W ZOOM Waterproof RGBW COB LED Wash Par Light

技术参数 Technical Specification

电源: AC90V-240V, 50/60Hz
功耗: 300W
光源: 260W大功率COB LED灯珠
控制方式: DMX512/Auto/Sound/Master slave
通道: 10个DMX通道
混色: RGBW全彩混合, 多种靓丽效果
变焦角度: 线性变焦8-60度
调光: 0-100%电动调光, 单色或混色
频闪: 1-25次/秒高速频闪, 单色或混色
使用寿命: 50,000 小时
防水等级: IP65

Power supply: AC90V-240V, 50/60Hz
Power consumption: 300W
Light source: 260W High Power COB LEDs
Control mode: DMX512/Auto/Sound/Master slave
Channel: 10 DMX Channels
Mixed Color: RGBW full color mixed with a variety of beautiful effects
Zoom Angle: Linear ZOOM 8-60 degree
Dimming: 0-100% electric dimmer, single color or mixed colors
Strobe: 1-25 times/s high speed strobe, single color or mixed color
Lifespan: 50,000 hours
Waterproof rating: IP65

IM-SL260



产品灯光效果 Product lighting effect



150W 双色防水爆闪观众灯

Waterproof 150W LED Audience Light

技术参数 Technical Specification

- 1.电源：AC100V-240V，50/60Hz
- 2.功率：200W
- 3.光源：1颗150W大功率COB LED
- 4.控制模式：DMX512 /自走/主从/声控
- 5.DMX通道：4通道
- 6.颜色：白光和暖白光
- 7.调光：0-A100%线性调光
- 8.频闪：0-25次/秒

- 1.Power supply: AC100V-240V, 50/60Hz
- 2.Power consumption: 200W
- 3.Light source: 1pcs 150W High Power COB LEDs
- 4.Control mode: DMX512/Auto/Sound/Master slave
- 5.Channel: 4 Channels
- 6.Colors: White and Warm white
- 7.Dimmer: linear dimming 0-100%
- 8.Strobe: 0-25 times /sec

IM-WPAL150



户外防水2 * 150W LED观众灯


技术参数 Technical Specification

- 电源：AC100V-240V，50/60Hz
功率：350W
光源：2颗150W大功率LED
控制模式：DMX512 /自走/声控/主从机
通道：1/3/9通道
颜色：白色和暖白色

- Power supply: AC100V-240V, 50/60Hz
Power consumption: 350W
Light source: 2pcs 150W High Power LEDs
Control mode: DMX512/Auto/Sound/Master slave
Channel: 1/3/9 Channels
Colors: White and Warm white

Outdoor Waterproof 2*150W LED Audience Light

IM-WPAL02150

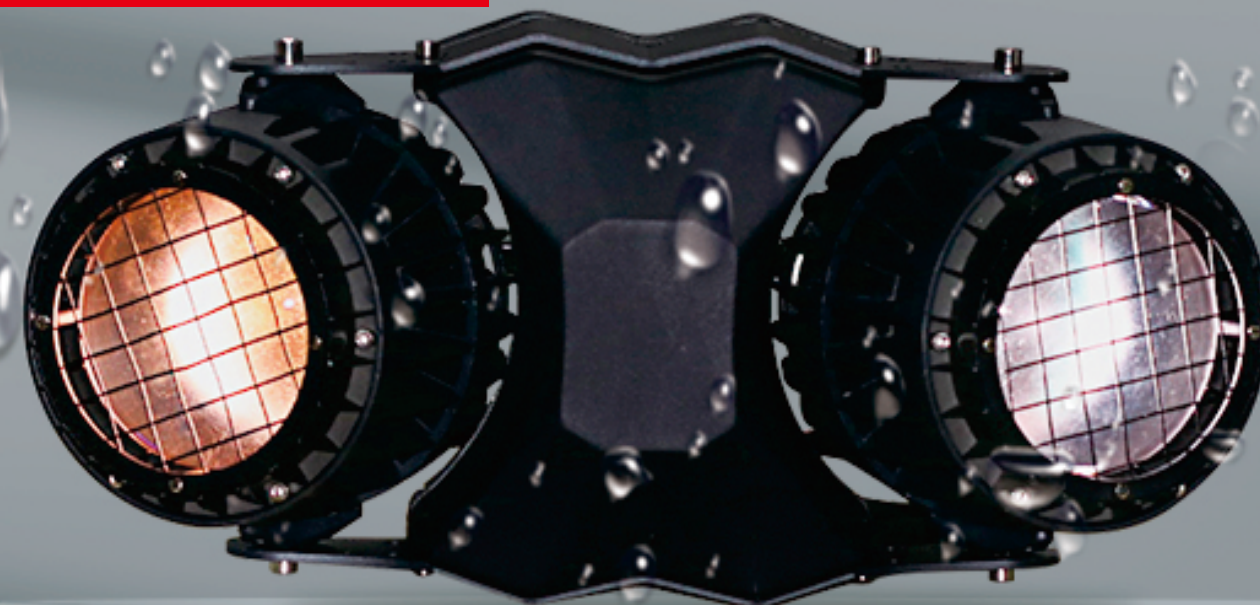

Waterproof Sky Super Beam 350W 17R Moving Head Light

技术参数 Technical Specification

输入电压：AC90–240V，50–60Hz
消耗功率：500W
光源：欧司朗350W 17R灯泡
灯泡寿命：2000小时灯泡寿命
540° 旋转和水平240°
16位平滑精确的PAN / TILT移动分辨率
扫描位置存储器，自动进行X / Y重定位校正
0–2.3° 光束角
固定色轮带14种固定颜色+打开
固定的Gobo轮带17个Gobos + Open
速度可调且方向可变的8–Facet Prism
16/20通道可以是可选的
通过4种模式控制：DMX 512，主/从，声控，自走
2.1英寸液晶显示器
IP 55 DMX电缆输入/输出
产品尺寸：490 × 404 × 722mm
净重：35kg 毛重：39kg

Input Voltage: AC90–240V, 50–60Hz
Power Consumption: 500W
High Power Original 350W R17 Phillips Lamp
2000 Hours Lamp Life Span
540° pan and 240° tilt movement
16 bit smooth and precise resolution for PAN/TILT movement
Scan position memory, auto X/Y reposition Correction
0 – 2.3° Beam Angle
Fixed color wheel with 14 fixed Colors + Open
Fixed Gobo wheel with 17 Gobos+Open
8–Facet Prism with Speed Adjustable and variable direction
16/20 Channels Can be optional
Control By 4 Modes: DMX 512, Master/Salve, Sound activity and work auto
2.1 Inch LCD Display
IP 55 DMX Cables IN/OUT
Product Size: 490 × 404 × 722mm
Net Weight: 35kg Gross Weight: 39kg

产品灯光效果 Product lighting effect



防水天地超光束350W
17R摇头灯

IM-MH350WP



600W户外防水天光束探照灯 IM-WPB600


技术参数 Technical Specification

输入电压：AC90–240V，50/60Hz
光源：原装OSRAM灯泡
寿命：1500–2000小时
消耗功率：600W
色温：7500K
镇流器：OSRAM
固定图案盘：14个固定金属图案+打开，双向摇动
棱镜：1个8面棱镜，可变速双向旋转
光束角：1.2°
雾化：1个雾化过滤器，可以达到柔和的灯光效果
快门/频闪：双频闪灯，0.5–20 F.P.S，速度可调
调光器：0–100%机械调光，平滑无闪烁
投影距离：在类似的平行光下可达1000m
控制模式：具有RDM功能的DMX512，通过大型DMX512控制器远程设置地址代码
通道：14/18
显示：2.8英寸彩色液晶显示屏，可180° 翻转
灯泡控制：通过控制器控制灯泡的开/关
水平：540° 旋转，8/16位调节
垂直：270° 旋转，8/16位调节
防护等级：IP65
灯具尺寸：L430 × W400 × H780mm

Input Voltage: AC90–240V, 50/60Hz
Light Source: Original OS–RAM lamp
Life Span: 1500~2000hours
Power Consumption: 600W
Color Temperature: 7500K
Ballast: OS–RAM
Fixed Gobo Wheel: 14pcs fixed metal gobos+open, bidirectionally shaking
Prism Wheel: 1pc 8–facet prism, bidirectionally rotating at variable speed
Beam Angle: 1.2°
Frost: 1pc frost filter, can achieve soft light effect
Shutter/Strobe: Independently strobe with double motors, 0.5–20 F.P.S, speed adjustable
Dimmer: 0–100% mechanical dimming, smooth without flicker
Projection Distance: Up to 1000m in similar parallel light
Control Mode: DMX512, with RDM function, remotely set the address code via a large DMX512 controller
Channel: 14/18
Display: 2.8 inch colorful LCD screen, 180° inversion
Lamp Control: Control the lamp on/off via controller
Pan: 540° rotation, 8/16Bit adjustment
Tilt: 270° rotation, 8/16Bit adjustment
IP Grade: IP65
Fixture Size: L430 × W400 × H780mm

600W Outdoor Waterproof Sky Beam Search Light

产品灯光效果 Product lighting effect




Slim 54×3W RGBW LED Par Light

超薄54×3W RGBW LED帕灯

IM-SPAR5403

技术参数 Technical Specification

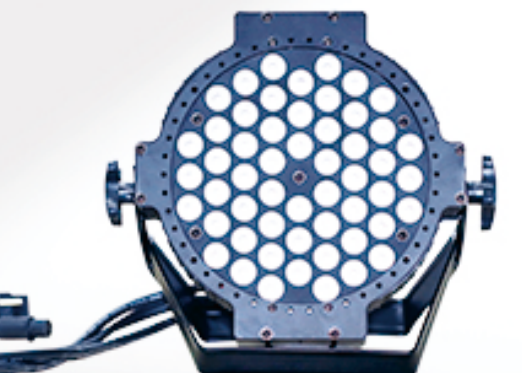

输入电压：AC90–240V，50/60Hz
总功率：165W
调光器：0–100%电子调光器
控制模式：DMX512，自走，主从，声控
灯泡寿命：50000小时
光束角：25度
电子调光：0–100%
控制通道：5Ch
LED颜色：红，绿，蓝，白
工作温度：–25° 至40°
净重：2.6kg
毛重：3kg
尺寸：310×310×415mm
装箱尺寸：55×29×41cm (2PCS/纸箱)

Input voltage: AC90–240V，50/60Hz
Total power: 165W
Dimmer: 0–100% electronic dimmer
Control mode: DMX512,Auto, master–slave, Sound active
Lamp life: 50000 hrs
Beam angle: 25degree
Electronic Dimming: 0–100%
Control channels: 5Ch
Color of LED: Red & Green & Blue & White
Operation Temperature: –25° to 40°
N.W: 2.6kg
G.W: 3kg
Dimension: 310×310×415mm
Packing size: 55×29×41cm(2PCS/CARTON)



New Slim 18×10W RGBW 4in1 LED Par Light

新款超薄18×10W RGBW 4合1 LED帕灯

IM-PL1810

技术参数 Technical Specification



额定电压：AC100–240V，50–60Hz
额定功率：200W
光源：18×10W
控制通道：6个DMX通道
光束角：25度
控制方式：DMX512，自走，主从，声控
混合色：RGBW全彩混合有多种美丽效果
防水等级：IP45
室内：20° C–40° C
外观：铝制外壳
产品尺寸：320×210×210mm
产品重量：5.1kg
包装重量：6kg

Rated voltage: AC100–240V，50–60Hz
Rated power: 200W
Light source: 18×10W
Control channel: 6 DMX channels
Beam angle: 25 degree (could customized for big order)
Control mode: DMX512,Auto, master–slave, Sound active
Mixed color: RGBW full color mixed with a variety of beautiful effects
Waterproof rating: IP45
Indoor: 20° C–40° C
Exterior view: aluminum case
Product size: 320×210×210mm
Product weight: 5.1kg
Package weight: 6kg



54*3W RGBW 4in1 LED Par Light

54*3W RGBW四合一LED帕灯

IM-PL5403

技术参数 Technical Specification



电源：AC90V–240V，50/60Hz
功率：200W
灯泡：54颗3W RGBW 4合1 LED
控制模式：DMX512，自走，主从，声控
发光角度：25度
通道：4/7通道
包装纸箱尺寸：25×25×36cm
毛重：5KG/pc

Power supply: AC90V–240V，50/60Hz
Power consumption: 200W
Lamp: 54pcs 3W RGBW 4in1 LEDs
Control mode: DMX512/Auto/Sound/Master slave
Light angles: 25 degree
Channel: 4/7 Channels
Packing Carton size: 25×25×36cm
G.W: 5KG/pc



New Update 54×3W LED Par Light

新款54×3W LED帕灯

IM-PL5403UP

技术参数 Technical Specification



电源：AC100V–240V，50/60Hz
功率：250W
光源：54颗3W CREE LED
控制模式：DMX512，自走，主从，声控
DMX通道：9通道
包装纸箱尺寸：30×30×40cm
毛重：8KG / pc

Power supply: AC100V–240V，50/60Hz
Power consumption: 250W
Light source: 54pcs 3W CREE LEDs
Control mode: DMX512/Auto/Sound/Master slave
DMX Channel: 9 Channels
Packing Carton size: 30×30×40cm
G. W: 8KG/pc



New 4*50W LED Audience Par Light

新型4*50W LED观众帕灯



技术参数 Technical Specification

电源：AC100V–240V，50/60Hz
功耗：250W
光源：4颗50W CREE LED
控制模式：DMX512 /自走/声控/主从
通道：1/3/9通道
包装纸箱尺寸：30 × 30 × 40cm
毛重：8KG/pc


Power supply: AC100V–240V, 50/60Hz
Power consumption: 250W
Light source: 4pcs 50W CREE LEDs
Control mode: DMX512/Auto/Sound/Master slave
Channel: 1/3/9 Channels
Packing Carton size: 30 × 30 × 40cm
G. W: 8KG/pc



IM-PAL0450

High Power 200W White & Warm White COB LED Par Light with Cover

大功率200W白&暖白COB LED帕灯带盖

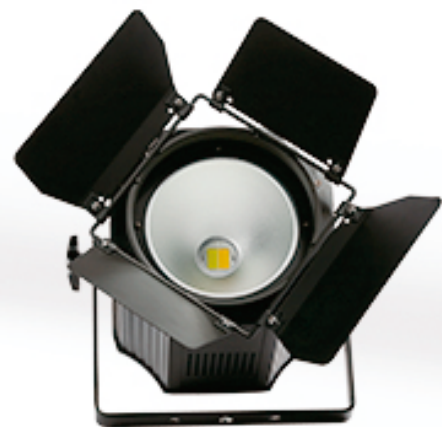

技术参数 Technical Specification

电源：AC90V–240V，50/60Hz
功率：230W
光源：200W白色和暖白色2合1 LED
DMX通道：2/4/6 DMX CH
控制模式：DMX512 /自走/声控/主从
颜色：白色和暖白色
调光器：0–100%电调光器，单色或混合色
频闪：1–25次/秒高速频闪，单色或混合色
显示屏：LED控制面板
包装纸箱尺寸：25 × 25 × 36cm
毛重：5KG/pcs

Power supply: AC90V–240V, 50/60Hz
Power consumption: 230W
Light Source: 200w white and warm white 2in1 LEDs
Control Signal: 2/4/6 DMX CHs
Control Mode: DMX512/Auto/Sound/Master slave
Colors: White and Warm White
Dimmer: 0–100% electric dimmer, single color or mixed colors
Strobe: 1–25 times/s high speed strobe, single color or mixed colors
Display: LED control panel
Packing Carton size: 25 × 25 × 36cm
G. W: 5KG/pcs

IM-PLCOB200

2*100W COB LED Audience Lights

2 * 100W COB LED观众灯



技术参数 Technical Specification

输入功率：AC100–240V 50/60Hz
功率：250W
LED光源：2颗大功率100W COB LED
颜色：白色和暖白色
发光角度：75度
色温：3000–5600K
控制方式：DMX512 /自走/声控/主从
通道：7CH
材质：金属铝
最佳投影距离：15–30米
调光器：线性调光0–100%
频闪：0–25次/秒
带防眩光镜片
尺寸：28 × 20 × 19cm
重量：6kg

Input power: AC100–240V 50/60Hz
Power consumption: 250W
LED Source: 2pcs high power 100W COB LEDs
Colors: White and warm white
Light angle: 75 degree
Color Temperature: 3000 – 5600K
Control mode: DMX/Master–slave/Auto/Sound activated;
Channels: 7CH
Material: Metal Aluminum
Best projection distance: 15–30 meters
Dimmer: linear dimming 0–100%
Strobe: 0–25 times /sec
With Anti Glare Lens
Dimension: 28 × 20 × 19cm
Weight: 6kg



4*100W COB LED Audience Lights

4 * 100W COB LED观众灯



技术参数 Technical Specification

输入功率：AC100–240V 50/60Hz
功率：400W
LED光源：4颗大功率100W COB LED
颜色：白色和暖白色
发光角度：60度
色温：3000–5600K
通道：2/6 / 12CH
材质：金属铝
最佳投影距离：15–30米
调光器：线性调光0–100%
频闪：0–25次/秒
控制模式：DMX512 /自走/声控/主从
尺寸：43 × 27 × 42cm
重量：8.5kg

Input power: AC100–240V 50/60Hz
Power consumption: 400W
LED Source: 4pcs high power 100W COB LEDs
Colors: White and warm white
Light angle: 60 degree
Color Temperature: 3000–5600K
Channels: 2/6/12CH
Material: Metal Aluminum
Best projection distance: 15–30 meters
Dimmer: linear dimming 0–100%
Strobe: 0–25 times /sec
Control mode: Auto, DMX, Master/Slave DMX
Dimension: 43 × 27 × 42cm
Weight: 8.5kg

IM-AL04100

60W LED ZOOM Framing Profile Spot Light

60W LED ZOOM切割成像影视灯

IM-SL60

技术参数 Technical Specification

电压：AC100–230V 50–60Hz
功率：60W
灯珠：R9 96.5 CRI 60W 3200K / 5600K LED
通道：1CH / 2CH
控制模式：DMX512
变焦角度：19–30度
频闪：1–25 /秒或随机
显示屏幕：数字LED屏幕
尺寸：39 × 19 × 13.5cm
净重：3KG
毛重：4KG

Voltage: AC100–230V 50–60Hz
Power: 60W
Lamp beads: R9 96.5 CRI 60W 3200K/5600K LED
Channel: 1CH/2CH
Control mode: DMX512
Zoom angle: 19–30 degrees
Strobe: 1–25/sec or random
Display screen: digital LED screen
Size: 39 × 19 × 13.5cm
Net weight: 3KG
Gross weight: 4KG



200W LED ZOOM Framing Theater Spot Light

200W LED ZOOM切割成像影视灯

IM-SL200

技术参数 Technical Specification

电压：AC100–230V 50–60Hz
功率：200W
灯珠：R9 96.5 CRI 200W 3200K / 5600K LED
通道：1CH / 2CH
控制模式：DMX512
变焦角度：19–30度
频闪：1–25 /秒或随机
显示屏幕：数字LED屏幕

Voltage: AC100–230V 50–60Hz
Power: 200W
Lamp beads: R9 96.5 CRI 200W 3200K/5600K LED
Channel: 1CH/2CH
Control mode: DMX512
Zoom Angle: 19–30 degree
Strobe: 1–25/second or random
Display screen: Digital LED screen



ZOOM 200W LED Spot Light

200W LED调焦聚光灯

IM-LZPL200A

技术参数 Technical Specification

额定电压：AC100/240V，50/60Hz
额定功率：250W
LED：1 × 200W LED
LED寿命：50000H
颜色：暖白
镜头角度：15–60度
调光：0–100%
频闪：0–25 Hz
控制模式：DMX，主/从
DMX通道：4个通道
最佳投影距离：4–30米
工作温度：–25–40℃
冷却：自由对流
防护等级：IP20

Rated Valtage: AC100/240V, 50/60Hz
Rated Power: 250W
LED: 1x200W LED
Lifetime: 50000H
Color: Warm white
Lens Angle: 15–60 Degree
Dimmer: 0–100%
Strobe: 0–25 Hz
Control Modes: DMX, Master/Slave,
DMX Channels: 4 Channels
Optimal Projection Distance: 4–30 Meters
Working Temperature: –25–40 °C
Cooling: Free convection
Protection Rating: IP20



900W Remote Control Blue LEDs Smoke Machine
900W遥控蓝色LED烟机



IM-FM900

技术参数 Technical Specification

电源：AC100V/220V，50/60Hz
功率：1200W
光源：9PCS RGB LED
预热时间：8mins
排烟量：2000cuft / min
油箱容量：2L
控制方式：无线控制/ DMX控制
无油保护：支持
通道：9 DMX通道

Power supply: AC100V/220V, 50/60Hz
Power: 1200W
Light source: 9PCS RGB LEDs
Pre-heating time: 8mins
Smoke output: 2000cuft/min
Tank capacity: 2L
Controller: Wireless control/DMX control
Oil-free protection: Support
Channels: 9 DMX Channel

RGB 3in1 LEDs 1200W Stage Fog Machine
RGB 3合1 LED 1200W舞台烟雾机



IM-FM1200

技术参数 Technical Specification

电源：AC110V/220V，50/60Hz
消耗功率：900W
光源：36PCS蓝色LED
预热时间：8mins
排烟量：1500cuft / min
油箱容量：1.5L
控制方式：无线遥控器/有线控制
毛重：3.5kg
包装尺寸：35 × 26 × 19.5cm

Power supply: AC110V/220V, 50/60Hz
Power consumption: 900W
Light Source: 36PCS Blue LEDs
Pre-heating time: 8mins
Smoke output: 1500cuft/min
Tank capacity: 1.5L
Control: Wireless Remote Control/ Wire Control
G.W: 3.5kg
Packing size: 35 × 26 × 19.5cm

1500W RGB LED Fog Machine

1500W RGB LED烟机

24颗RGB 3合1 LED 火焰式立式烟机



24pcs RGB 3in1 LEDs
Pyro Vertical Smoke Machine

技术参数 Technical Specification

电压: AC110V–220V, 50 / 60Hz
功率: 1500W
光源: 24PCS RGB LED
预热时间: 8mins
排烟量: 4000cuft / min
油箱容量: 2.5L
控制器: 无线控制/ DMX控制
无油保护: 支持
通道: 9 DMX通道
毛重: 7KG / pc
尺寸: 51 × 40 × 27cm /个

IM-FM1500

Power supply: AC110V–220V, 50/60Hz
Power: 1500W
Light source: 24PCS RGB LEDs
Pre–heating time: 8mins
Smoke output: 4000cuft/min
Tank capacity: 2.5L
Controller: Wireless control/DMX control
Oil–free protection: Support
Channel: 9 DMX Channel
G.W: 7KG/pc
Size: 51 × 40 × 27cm/pc

1000W Professional Haze Machine

1000W专业晨雾机

IM-HM1000

技术参数 Technical Specification

电压: AC110V–220V, 50/60Hz
功率: 1000W
保险丝: 5A / 250V
预热时间: 0分钟
排烟量: 3500 cuft / min
油箱容量: 2.5L
耗油量: 24h / L
控制方式: LCD控制/ DMX控制
DMX通道: 2个通道
装箱尺寸: 52 × 39 × 36cm
毛重: 34kg

Voltage used: AC110V–220V, 50/60Hz
Power: 1000W
Fuse: 5A/250V
Pre–heating time: 0 min
Smoke output: 3500 cuft/min
Tank capacity: 2.5L
Oil consumption: 24h/L
Control: LCD control/DMX control
DMX Channel: 2 channels
Packing size: 52 × 39 × 36cm
G.W: 34kg



3000W 低地水雾烟机

3000W Low Lying Water Base Fog Machine



技术参数 Technical Specification

电压: AC110–220V, 50/60Hz
功率: 3000W
覆盖面积: 100–150平方米
排烟量: 8000cuft / min
耗油率: 1h/L
水箱容量: 18L
油箱容量: 2L
预热时间: 3分钟
控制方式: DMX512/面板控制/无线遥控
显示屏: LCD显示屏
DMX通道: 2 DMX 通道
净重: 36.6kg
毛重: 42kg
尺寸: 91 × 47 × 58cm

IM-WM3000

Input Voltage: AC110–220V, 50/60Hz
Power: 3000W
Cover area: 100–150 square meter
Smoke output: 8000cuft/min
Oil consumption rate: 1h/L
Water Tank capacity: 18L
Oil Tank capacity: 2L
Pre–heating time: 3mins
Control modes: DMX512, Control on board, Wireless Remote
Display: LCD Display
DMX Channels: 2CHs
N.W: 36.6kg
G.W: 42kg
Dimensions: 91 × 47 × 58cm

900W Mist Haze Machine

900W薄雾机



技术参数 Technical Specification

电压: AC110V–220V, 50/60Hz
保险丝: 8A/250V
功率: 900W
预热: 2分钟
排烟量: 3500 cuft / min
油箱容量: 3.5升
耗油量: 100MIN / L
控制器: LCD–3控制器/ DMX512
DMX通道: 3个通道
装箱尺寸: 57 × 21 × 48cm
毛重: 17.5kg

IM-HM900H

Voltage: AC110V–220V, 50/60Hz
Fuse: 8A/250V
Power: 900W
Preheat: 2 minutes
Smoke output: 3500 cuft/min
Fuel tank capacity: 3.5 liters
Fuel consumption: 100MIN/L
Controller: LCD–3 Controller / DMX512
DMX channel: 3 channels
Packing size: 57 × 21 × 48cm
Gross weight: 17.5kg

8 Output Ports DMX512 Signal Distribution Amplifier

8个输出端口DMX512信号分配放大器

IM-AC006



技术参数 Technical Specification

输入电压: AC90V–240V, 50/60Hz;
额定功率: 15W;
DMX方式: 8端口DMX512方式;
DMX分离器类型: 输入和输出具有RS–485额定值;
完全符合DMX512规范;
3针XLR输入和无源环通;
毛重: 2.5KG;
尺寸: 53×20×12cm/pc。

Input voltage: AC90V–240V,50/60Hz;
Power rated: 15W;
DMX Ways: 8 Ports DMX512 Ways;
DMX Splitter Type: Input and output are with RS–485 rated;
Fully compliant to DMX512 specifications;
3 pin XLR input and a passive loop through;
G.W: 2.5KG;
Size: 53×20×12cm/pc.

LCD Screen Disco 240 DMX Controller

LCD屏幕Disco 240 DMX控台

IM-DISCO240



技术参数 Technical Specification

输出信号规格: DMX512国际标准
通道总数: 240路
扫描仪数量: 24台扫描仪
最高 扫描仪的通道数8
追逐 (场景) 数: 24追逐
最大跟踪步数 (场景) : 40个步
追逐步数 (场景) : 480步
场景暂停时间: 0.1–25.5秒/步
场景穿越速度: 0.1–25.5秒
调光器频道: 24个频道
显示屏LCD显示屏, 16×2字符
DMX512输出接口: 3芯XLR引脚插座和插座
内存容量: 128 K大容量存储卡
输入电压: AC90–240V, 50/60Hz
尺寸: 483×178×80mm

Output signal specifications: DMX512 international standard
Total number of channels: 240 Road
Number of scanners: 24 scanner
Max. number of channels for the scanner 8
Number of chases(scenes): 24 chase
Maximal number of chase steps(scene): 40 steps
Total number of chase steps(scene): 480 steps
Scene pause time: 0.1–25.5 second/step
Scene cross speed: 0.1–25.5 seconds
Dimmer channel: 24 channels
Display screen LCD display, 16×2 characters
DMX512 outputs interface: 3–core XLR pin socket and socket
Memory capacity: 128 K high capacity memory card
Input voltage: AC90–240V, 50/60Hz.
Size: 483×178×80mm

New Sunny 512 Scanner DMX Console

新阳光512扫描仪DMX控制台

IM-SUNNY512



技术参数 Technical Specification

新的Sunny 512扫描仪DMX控制台是专门设计来控制各种扫描仪的。
为了采用双CPU协同工作, 高速MCU进行精确控制以实现16Bit X / Y运动。
最多可以连接32个扫描仪, 每个扫描仪最多16个通道。
可以同时操作多场景和多程序, 并可以同时选择32个扫描仪。
它配备了两组DMX 512信号, 适用于宽范围的电源电压。
控制台的编辑模式和运行模式方便灵活。
因此很容易编辑和处理。
New Sunny 512是艺术表演, 戏剧, 舞蹈和表演的最佳服装。

New Sunny 512 scanner DMX console is specially designed to control the various scanners.
To adopt double CPU work in coordination, high speed MCU proceed the precise control to achieve 16Bit X/Y movement. Up to 32 scanners may be connected with a maximum of 16 channels each. Multi scenes and multi chase programs can be operated at the same time, and 32 scanners can be selected simultaneously. It is equipped with two groups of DMX 512 signals and is adapted for wide range of power voltage. The edit mode and running mode of the console are convenient and flexible. So it is easy to edit and to handle. New Sunny 512 is the best suit for art show, theater, dancing and acting.

Professional 1024 Channels Mini Pearl DMX Console

专业的1024通道迷你珍珠 DMX控制台

IM-MINI PEARL



技术参数 Technical Specification

1024 DMX控制器最多可控制96个灯具。
它与Avolite Pearl R20格式的库兼容, 并具有平移/倾斜圆, RGB彩虹, 光束变暗波等内置形状效果。
可以同时输出10个场景和5种内置形状。
滑块可用于输出场景
并调整场景中调光器通道的强度。

1024 DMX controller can control up to 96 fixtures.
It is compatible with the library in Avolite Pearl R20 format and featured with built–in shape effects of pan/tilt circle, RGB rainbow, beam dimming wave, etc. 10 scenes and 5 built–in shapes can be output simultaneously. Sliders can be used to output scenes and adjust the intensity of the dimmer channels in the scenes.

IM-Quartz Quartz Touch Screen DMX Console

IM-Quartz石英触摸屏DMX控制台

IM-Quartz

技术参数 Technical Specification

使用11.1 / 11.0 / 10.1 / 10.0，无时间限制
内置8种语言，支持中文菜单显示
内置14.1倾斜式宽屏触摸显示屏，高分辨率和高亮度
配备强大的Intel i5 CPU，4G DDR3内存，120G SSD
3个高精度进口编码器
内置的Visualiser 3D可视化软件
超过1000个虚拟重播
强大的CMY调色板功能，支持涂鸦手写命名
支持窗口大小调整
内置1000多个光源库，内置光源库编辑软件
电源：100–120V，200–240V 50 / 60Hz
内置UPS不间断电源，0延时自动切换
支持连接计算机以进行离线编程等
控制台带有4个物理DMX输出，2048个通道
1 MIDI接口，支持MIDI时间码
1工作灯接口
1 VGA外部屏幕接口，可以连接到外部触摸显示器
3个USB端口

Use 11.1/11.0/10.1/10.0, no time limit
Built-in 8 languages, support Chinese menu display
Built-in a 14.1 tilt widescreen touch display, high resolution and high brightness
With powerful Intel i5 CPU, 4G DDR3 memory, 120G SSD
3 high-precision imported encoders
Built-in Visualiser 3D visualization software
More than 1000 virtual replays
Powerful CMY palette function, support for graffiti handwriting naming
Support window size adjustment
Built-in over 1000 light libraries, built-in light library editing software
power supply: 100–120V, 200–240V 50/60Hz
Built-in UPS uninterruptible power supply, 0 delay automatic switching
support connecting computers for offline programming, etc.
The console comes with 4 physical DMX outputs, 2048 channels
1 MIDI interface, support MIDI time code
1 work light interface
1 VGA external screen interface, can be connected to an external touch display
3 USB ports



IM-Quartz Plus Quartz Double Touch Screen DMX Console

IM-Quartz Plus Quartz 双触摸屏DMX控制台

IM-Quartz Plus

技术参数 Technical Specification

1：使用11.1 / 11.0 / 10.1 / 10.0，无时间限制
2：控制台随附一键还原软件
3：内置8种语言，支持中文菜单显示
4：30个可分页的程序推子，20个可编程的多功能按钮
5：内置2个14.1宽屏触摸屏，高分辨率，高亮度
6：配备功能强大的Intel i5 CPU，4G DDR3、120G SSD
7：3个高精度进口编码器
8：内置的Visualiser 3D可视化软件
9：超过1000个虚拟重播
10：强大的CMY调色板功能，支持涂鸦手写命名
11：支持窗口大小调整
12：内置1000多个光源库，内置光源库编辑软件
13：采用台湾明纬开关电源，100–120V，200–240V 50 / 60Hz
14：内置UPS不间断电源，零延迟自动切换
15：控制台带有12个DMX物理输出，6144个通道
16：支持Art-net多达32768个通道的64个DMX输出
17：1个千兆以太网端口；支持Art-net网络功能，Avotalk和Citp协议
18：2个MIDI接口，支持MIDI时间码
19：1工作灯接口
20：1 USB接口

1: Use 11.1/11.0/10.1/10.0, no time limit
2: The console comes with one-click restore software
3: Built-in 8 languages, support Chinese menu display
4: 30 pageable program faders, 20 programmable multi-function buttons
5: Built-in 2 14.1 widescreen touch screen display, high resolution and high brightness
6: With powerful Intel i5 CPU, 4G DDR3, 120G SSD
7: 3 high-precision imported encoders
8: Built-in Visualiser 3D visualization software
9: More than 1000 virtual replays
10: Powerful CMY palette function, support for graffiti handwriting naming
11: Support window size adjustment
12: Built-in over 1000 light libraries, built-in light library editing software
13: Adopt Taiwan Ming Wei switching power supply, 100–120V, 200–240V 50/60Hz
14: Built-in UPS uninterruptible power supply, 0 delay automatic switching
15: The console comes with 12 physical DMX outputs, 6144 channels
16: Support Art-net up to 32768 channels of 64 DMX outputs
17: 1 Gigabit Ethernet port; support Art-net network function, Avotalk and Citp protocol
18: 2 MIDI interfaces, support MIDI time code
19: 1 work light interface
20: 1 USB interfac



IM-Tiger Touch Tiger Touch Pro Touch Screen DMX Console

IM-Tiger Touch Tiger Touch Pro触摸屏DMX控制台

IM-Touch Tiger

技术参数 Technical Specification

- 1: 11.1 / 11.0 / 10.1 / 10.0 / 9.1, 无时间限制
- 2: 控制台随附一键还原软件
- 3: 内置8种语言,
- 4: 开模定制人体工学扶手, 外形美观, 大气简约
- 5: 内置15.4宽触摸屏, 高分辨率和高亮度
- 6: 配备强大的Intel i5 CPU, 4G内存, 128G SSD
- 7: 20个程序推子, 10个宏功能按钮
- 8: 3个高精度进口编码器
- 9: 内置的Visualiser 3D可视化软件
- 10: 超过1000个虚拟重播
- 11: 强大的CMY调色板功能, 支持涂鸦风格的手写命名功能
- 12: 支持窗口大小调整
- 13: 内置1000多个光源库, 内置光源库编辑软件
- 14: 台湾明纬开关电源, 100–120V, 200–240V 50 / 60Hz
- 15: 内置UPS不间断电源, 零延迟自动切换
- 16: 控制台带有12个DMX物理输出, 6144个通道
- 17: 支持Art–net最多可以扩展到64个DMX输出端口32768个通道
- 18: 1个千兆以太网端口; 支持Art–net网络功能, Avotalk和Cipt协议
- 19: 2个MIDI接口, 支持MIDI时间码
- 20: 1工作灯接口
- 21: 4个USB接口
- 22: 1 VGA外部屏幕接口, 可以连接到外部触摸显示器

- 1: 11.1/11.0/10.1/10.0/9.1, no time limit
- 2: One–key restoration software comes with the console
- 3: Built–in 8 languages,
- 4: Open mold custom ergonomic handrail, beautiful appearance, simple atmosphere
- 5: Built–in 15.4 wides touch screen, high resolution and high brightness
- 6: With powerful Intel i5 CPU, 4G memory, 128G SSD
- 7: 20 program faders, 10 macro function buttons
- 8: 3 high–precision imported encoders
- 9: Built–in Visualiser 3D visualization software
- 10: More than 1000 virtual replays
- 11: Powerful CMY palette function, support graffiti–style handwriting naming function
- 12: Support window size adjustment
- 13: Built–in over 1000 light libraries, built–in light library editing software
- 14: Taiwan Mingwei switching power supply, 100–120V, 200–240V 50/60Hz
- 15: Built–in UPS uninterruptible power supply, 0 delay automatic switching
- 16: The console comes with 12 physical DMX outputs, 6144 channels
- 17: Support Art–net can be expanded up to 64 DMX output ports 32768 channels
- 18: 1 Gigabit Ethernet port; supports Art–net network function, Avotalk and Cipt protocol
- 19: 2 MIDI interfaces, support MIDI time code
- 20: 1 work light interface
- 21: 4 USB interfaces
- 22: 1 VGA external screen interface, can be connected to an external touch display



IM-Tiger2 New Tiger Touch Pro Touch Screen DMX Console

IM-Tiger2新型Tiger Touch Pro触摸屏DMX控制台

IM-Tiger2

技术参数 Technical Specification

- 1: 11.1 / 11.0 / 10.1 / 10.0 / 9.1, 无时间限制
- 2: 控制台随附一键还原软件
- 3: 内置8种语言
- 4: 开模定制人体工学扶手, 外形美观, 大气简约
- 5: 内置15.6宽屏触摸屏, 高分辨率和高亮度
- 6: 配备强大的Intel i5 CPU, 4G内存, 128G SSD
- 7: 20个程序推子, 10个宏功能按钮
- 8: 3个高精度进口编码器
- 9: 内置的Visualiser 3D可视化软件
- 10: 超过1000个虚拟重播
- 11: 强大的CMY调色板功能, 支持涂鸦风格的手写命名功能
- 12: 支持窗口大小调整
- 13: 内置1000多个光源库, 内置光源库编辑软件
- 14: 台湾明纬开关电源, 100–120V, 200–240V 50 / 60Hz
- 15: 内置UPS不间断电源, 零延迟自动切换
- 16: 控制台带有12个DMX物理输出端口和6144个通道。
- 17: 支持Art–net最多可以扩展到64个DMX输出端口32768个通道
- 18: 1个千兆以太网端口; 支持Art–net网络功能, Avotalk和Cipt协议
- 19: 2个MIDI接口, 支持MIDI时间码
- 20: 1工作灯接口
- 21: 4个USB接口
- 22: 1 VGA外部屏幕接口, 可以连接到外部触摸显示器

- 1: 11.1/11.0/10.1/10.0/9.1, no time limit
- 2: One–key restoration software comes with the console
- 3: Built–in 8 languages
- 4: Open mold custom ergonomic handrail, beautiful appearance, simple atmosphere
- 5: Built–in 15.6 widescreen touch screen, high resolution and high brightness
- 6: With powerful Intel i5 CPU, 4G memory, 128G SSD
- 7: 20 program faders, 10 macro function buttons
- 8: 3 high–precision imported encoders
- 9: Built–in Visualiser 3D visualization software
- 10: More than 1000 virtual replays
- 11: Powerful CMY palette function, support graffiti–style handwriting naming function
- 12: Support window size adjustment
- 13: Built–in over 1000 light libraries, built–in light library editing software
- 14: Taiwan Mingwei switching power supply, 100–120V, 200–240V 50/60Hz
- 15: Built–in UPS uninterruptible power supply, 0 delay automatic switching
- 16: The console comes with 12 physical DMX output ports and 6144 channels.
- 17: Support Art–net can be expanded up to 64 DMX output ports 32768 channels
- 18: 1 Gigabit Ethernet port; supports Art–net network function, Avotalk and Cipt protocol
- 19: 2 MIDI interfaces, support MIDI time code
- 20: 1 work light interface
- 21: 4 USB interfaces
- 22: 1 VGA external screen interface, can be connected to an external touch display



IM-NPU Grand NPU Powerful Computing to Convert Network Signals into DMX Signals

IM-NPU Grand NPU功能强大的计算功能可将网络信号转换为DMX信号



IM-AC006

技术参数 Technical Specification

- 1: 专业的Linux操作系统,
- 2: NPU的CPU与Grand MA控制台的CPU完全相同。
- 3: 具有强大的计算能力, 可以将网络信号转换为DMX信号;
- 4: 内置8个DMX输出端口4,096个通道,
- 5: 内置7英寸TFT触摸屏显示器。
- 6: 1个千兆以太网接口,
- 7: 2个USB 2.0连接接口
- 8: 多个MA控制台可以共享一个或多个NPU进行热备份。
- 9: 支持协议, 例如DMX512, ART-NET和ACN。

- 1: Professional Linux operating system,
- 2: The NPU has exactly the same CPU as the Grand MA console.
- 3: Has powerful computing power to convert network signals into DMX signals;
- 4: Built-in 8 DMX output ports 4,096 channels,
- 5: Built-in a 7-inch TFT touch screen display.
- 6: 1 Gigabit Ethernet interfaces,
- 7: 2 USB 2.0 connection interfaces
- 8: Multiple MA consoles can share one or more NPUs for hot backup.
- 9: Supports protocols such as DMX512, ART-NET and ACN.

IM-MA2 Grand MA2 Double Touch Screen DMX Console

IM-MA2 Grand MA2双触摸屏DMX控制台

技术参数 Technical Specification

- 1: 专业的Linux操作系统
- 2: 内置2个电动升降机15.4英寸工业全视角触摸屏和1个9英寸触摸屏
- 3: 强大的i5 CPU, 8G内存, 120G SSD。
- 4: 6个DMX输出端口, 1个复合DMX输入端口(可以设置为输出)
- 5: NPU最多可连接65536个通道
- 6: 15个带传感器功能的电子重放推子(60毫米), 50个执行按钮
- 7: 1个总控制推杆, 1个调光轮
- 8: 1可控XY轴高精度进口轨迹球
- 9: 2个A/B现场电动推杆(100mm)
- 10: 6个进口工业级耐磨编码器(具有推功能)
- 11: 2个千兆以太网端口, 支持MA NET, ARTNET等信号
- 12: 5个USB端口, 1个备用USB端口
- 13: 2个工作灯接口
- 14: 2个DVI接口, 可扩展两个显示器
- 15: MIDI输入输出接口
- 16: 内置1个抽屉, 内置黄色背光机械键盘(背光亮度可调)
- 17: 宽电压工业电源100V-240V 50/60Hz
- 18: 内置大功率UPS不间断电源
- 19: 支持RDM功能

- 1: Professional Linux operating system
- 2: Built-in 2 electric lift 15.4 inch industrial full-view touch screen, and one 9-inch touch screen
- 3: Powerful i5 CPU, 8G memory, 120G SSD.
- 4: 6 DMX output ports, 1 composite DMX input port (can be set as output)
- 5: Up to 65536 channels can be connected to the NPU
- 6: 15 electric replay faders with sensor function (60mm), 50 executive buttons
- 7: 1 total control putter, 1 dimming wheel
- 8: 1 controllable XY axis high precision imported trackball
- 9: 2 A/B field electric push rods (100mm)
- 10: 6 imported industrial grade wear-resistant encoders (with Push function)
- 11: 2 Gigabit Ethernet ports, support MA NET, ARTNET and other signals
- 12: 5 USB ports, 1 backup USB port
- 13: 2 work light interfaces
- 14: 2 DVI interfaces, expandable two displays
- 15: MIDI input and output interface
- 16: Built-in 1 drawer, built-in yellow backlit mechanical keyboard (backlight brightness adjustable)
- 17: Wide-voltage industrial power supply 100V-240V 50/60Hz
- 18: Built-in high power UPS uninterruptible power supply
- 19: Support RDM function

IM-MA2-P3 Grand Ma2 Three Touch Screen DMX Console

IM-MA2-P3 三触摸屏全尺寸DMX控制台

技术参数 Technical Specification

- 1: Linux操作系统, 最新软件版本
- 2: 内置三块电动升降15.4英寸工业全视图触摸屏, 一块9英寸触摸屏
- 3: 强大的i5CPU, 8G内存, 内置固态驱动器
- 4: 6个DMX输出端口, 1个复合DMX输入端口(可以设置为输出),
- 5: 连接到NPU时最多支持65536个通道
- 6: 30个带有感应功能的电子播放推子(60毫米), 80个程序执行按钮
- 7: 1主推子 1调光轮
- 9: 1可控XY轴高精度进口轨迹球
- 10: 2 A/B现场电动推杆(100mm)
- 11: 7种进口工业级耐磨编码器(具有推功能)
- 12: 2个千兆以太网端口, 支持MA NET和ARTNET等信号
- 13: 5个USB端口, 1个备用USB端口
- 14: 2个工作灯接口
- 15: MIDI输入输出接口
- 16: 内置2个抽屉, 内置黄色背光机械键盘
- 17: 宽电压工业电源100V-240V 50/60Hz
- 18: 内置大功率UPS不间断电源
- 19: 支持RDM功能



IM-MA2-P3

- 1: Linux operating system, latest software version
- 2: Built-in three electric lifting 15.4-inch industrial full-view touch screens, one 9-inch touch screen
- 3: Powerful i5CPU, 8G memory, built-in solid state drive
- 4: 6 DMX output ports, 1 composite DMX input port (can be set as output),
- 5: Supports up to 65536 channels when connected to the NPU
- 6: 30 electric playback faders with induction function (60mm), 80 program execution buttons
- 7: 1 master fader 1 dimming wheel
- 9: 1 controllable XY axis high precision imported trackball
- 10: 2 A/B field electric putters (100mm)
- 11: 7 imported industrial-grade wear-resistant encoders (with Push function)
- 12: 2 Gigabit Ethernet ports, supporting signals such as MA NET and ARTNET
- 13: 5 USB ports, 1 backup USB port
- 14: 2 work light interfaces
- 15: MIDI input and output interface
- 16: Built-in 2 drawers, built-in yellow backlit mechanical keyboard
- 17: Wide voltage industrial power supply 100V-240V 50/60Hz
- 18: Built-in high-power UPS uninterruptible power supply
- 19: Support RDM function



USB to DMX Interface Adapter

USB至DMX接口适配器



技术参数 Technical Specification

它可以在Windows XP, Vista, Windows7, Windows 8, Windows 10 (32位和64位) 上广泛使用。
而且, 由于其中包含CD的驱动程序, Freestyle软件和安装视频, 因此安装非常容易。
It can be widely on windows XP, Vista, windows7, windows 8, windows 10 (32bit and 64bit).
And it is easy to install since there is a CD with drivers, Freestyle software, installation video in.

80cm Stage Light Safety Cables

80cm舞台灯保险绳

技术参数 Technical Specification

- 1: 用于舞台灯光/烟雾机的高质量80厘米安全电缆
- 2: 钢材质, 带PVC盖
- 3: 安全耐用
- 4: 包: 10 x 80cm安全电缆

- 1: High quality 80cm Safety Cables for Stage Lights/Fog Machines
- 2: Steel Material with PVC cover
- 3: Safety and durable
- 4: Package: 10 x 80cm Safety Cables



6.5 feet / 2 Meter DMX Cable

2米DMX信号线

技术参数 Technical Specification

高品质的3针公对母舞台光缆, 用于DMX信号传输
专为精确传输数字音频和DMX照明控制数据而设计
连接舞台灯, 非常适合聚会, 婚礼和任何类型的节日场合
适用于舞台灯的各种产品: 摇头灯, 帕灯, 具有XLR输入和输出的聚光灯
DMX电缆插头材料: 塑料
连接器: 公头和母头
长度: 6.5英尺/ 2米
标称特性阻抗: 110 Ohms

High quality 3 pin male to female stage light cable for DMX signal transmission
Designed for accurate transmission of digital audio and DMX lighting control data
Connect stage lights that will be great for parties, weddings, and any type of festival occasion
Suitable for various products of stage light: moving head light, par light, spotlight with XLR input & output
DMX Cable Plugs Material: Plastic
Connectors: Male and Female
Length: 6.5 feet / 2 Meter
Nominal Characteristic Impedance: 110 Ohms



IM-UTDMX01

Blue PowerCon Plug Connector

蓝色电源插头



技术参数 Technical Specification

颜色: 灰色
PowerCon插头材料: 阻燃塑料
连接器: 母
包: 25 x PowerCon母头电源座
Color: Grey
PowerCon Plug Material: Flame Retardant Plastic
Connectors: Female
Package: 25 x Female PowerCon Plug Connectors

IM-AC010



IM-AC008

技术参数 Technical Specification

颜色: 蓝色
PowerCon插头材料: 阻燃塑料
连接器: 公头
包: 20 x PowerCon电源插头
Color: blue
PowerCon Plug Material: Flame Retardant Plastic
Connectors: Male
Package: 20 x PowerCon Plug Connector

Grey PowerCon Plug Connector

灰色电源座

IM-AC009



Blue PowerCon Plug Connector

蓝色电源座

技术参数 Technical Specification

颜色: 蓝色
PowerCon插头材料: 阻燃塑料
连接器: 母
包: 25 x PowerCon母头电源座
Color: Blue
PowerCon Plug Material: Flame Retardant Plastic
Connectors: Female
Package: 25 x Female PowerCon Plug Connectors

Safety Stage Light Clamp 安全舞台灯勾



技术参数 Technical Specification

颜色：原装
材质：铝
宽度：30mm
适用：各种舞台灯光产品，特别是舞台光束灯产品
包：1 x安全舞台灯光。
Color: original
Material: Aluminum
Width: 30mm
Suitable: All kind of stage lighting products, especially for stage beam light products
Package: 1 x Safety Stage Light Clam

M-AC014



Safety Stage Light Clamp 安全舞台灯勾



技术参数 Technical Specification

颜色：原装
材质：铝
宽度：30mm
适用：各种舞台灯光产品，特别是舞台光束灯产品
包：1 x安全舞台灯夹。
Color: original
Material: Aluminum
Width: 30mm
Suitable: All kind of stage lighting products, especially for stage beam light products
Package: 1 x Safety Stage Light Clam

IM-AC012



Safety Stage Light Clamp 安全舞台灯勾

技术参数 Technical Specification

颜色：原装
材质：铝
宽度：30mm
适用：各种舞台灯光产品，特别是舞台光束灯产品
包：1 x安全舞台灯夹。
Color: original
Material: Aluminum
Width: 30mm
Suitable: All kind of stage lighting products, especially for stage beam light products
Package: 1 x Safety Stage Light Clam

IM-AC013



Safety Stage Light Clamp 安全舞台灯勾



技术参数 Technical Specification

颜色：原装
材质：铝
宽度：40mm
适用：各种舞台灯光产品，特别是舞台光束灯产品
包：1 x安全舞台灯夹。
Color: original
Material: Aluminum
Width: 40mm
Suitable: All kind of stage lighting products, especially for stage beam light products
Package: 1 x Safety Stage Light Clam

IM-AC011



2in1 Flight Case 1装2航空箱



技术参数 Technical Specification

航空箱装载数量：2个灯
Flight Case loading quantity: 2 pieces lights

IM-AC020




2in1 Flight Case 1装2航空箱

IM-AC021

技术参数 Technical Specification

航空箱装载数量: 2个灯 Flight Case loading quantity: 2 pieces lights

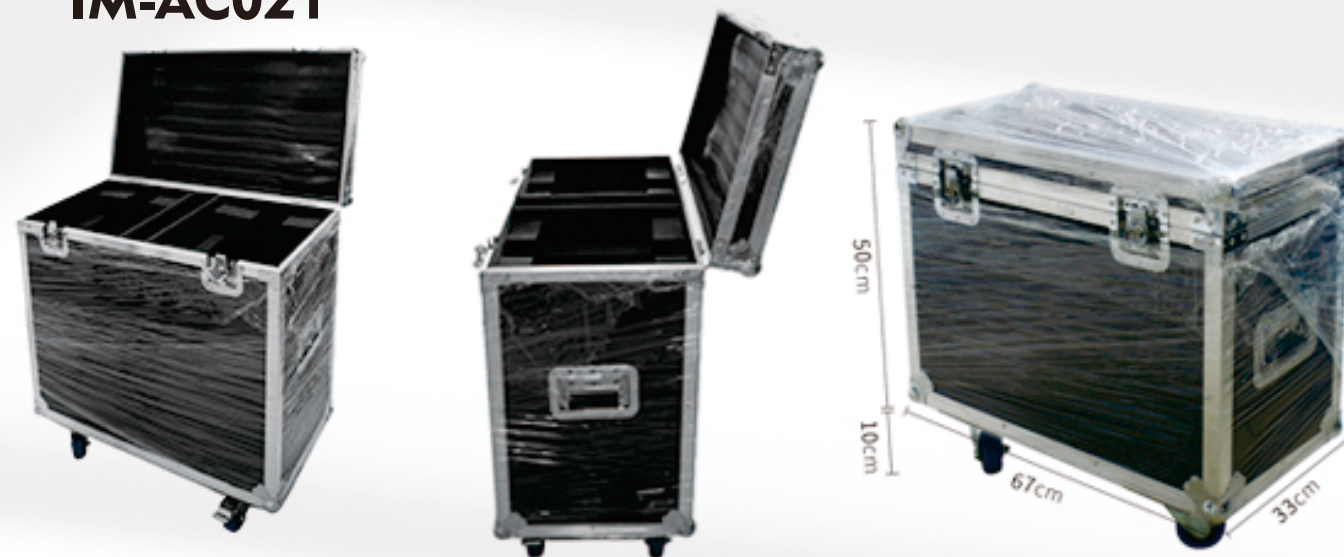

1in1 Flight Case 1装1航空箱

IM-AC022

技术参数 Technical Specification

航空箱装载数量: 1个灯 Flight Case loading quantity: 1 pieces lights



4in1 Flight Case 1装4航空箱

IM-AC023

技术参数 Technical Specification

航空箱装载数量: 1个灯 Flight Case loading quantity: 1 piece light



8in1 Flight Case 1装8航空箱

IM-AC026

技术参数 Technical Specification

航空箱装载数量: 8个灯 Flight Case loading quantity: 8 piece light

