


IM-PLCOB200

200W Warm And White LED COB Par Light



Thank you for choosing IMRELAX fixtures, please enjoy this product and light up the world!

1. LED Display Window:

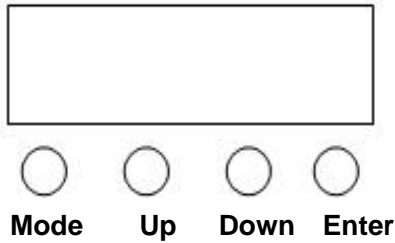

Press "Mode" will be 9 kinds of different functions. First two letters stands for functions (Please refer to Function Table below), last two letters stands for address or speed under this function. Up or Down can change value then Enter can be saved.

2. Function Table- (All functions should be Enter then can be saved)

Item	Display	Function
1	A001	DMX Mode address from 001-512 Up Down to choose address
2	2CH—4CH—6CH	DMX Mode
3	CC99	Color Chasing speed (01-99) Up or Down can change speed
4	CP99	Color Fade (01-99) Up or Down can change speed
5	SE99	Color Pulse (01-99) Up or Down can change speed
6	BEBE	Sound
7	Y255	Pure Warm Dimmer (000-255)
8	W255	Pure White Dimmer (000-255)
9	N000	Strobe (000-255) slow-fast

3. DMX512 Channel(A6ch)

CH	Function	Details
1	Dimmer	0-255 Dark-Bright
2	Strobe	0-255 Slow-Fast
3	Function Selection	0-50: Empty 51-100: Color fade mode 1 101-150: Color fade mode 2 151—200: Color fade mode 3 201—255: Sound
4	Function Speed	0-255, Slow-Fast Speed
5	Warm Dimmer	000-255
6	White Dimmer	000-255

4. DMX512 Channel(b6ch)

CH	Function	Details
1	Dimmer	0-255 Dark-Bright
2	Warm Dimmer	000-255
3	White Dimmer	000-255
4	Strobe	0-255 Slow-Fast
5	Function Selection	0-50: Empty 51-100: Color fade mode 1 101-150: Color fade mode 2 151—200: Color fade mode 3 201—255: Sound
6	Function Speed	0-255, Slow-Fast Speed

5. DMX512 Channel(A4ch)

CH	Function	Details
1	Dimmer	0-255 Dark-Bright
2	Warm Dimmer	000-255
3	White Dimmer	000-255
4	Strobe	0-255 Slow-Fast

6. DMX512 Channel(b4ch)

CH	Function	Details
1	Dimmer	0-255 Dark-Bright
2	Strobe	0-255 Slow-Fast
3	Function Selection	0-50: Empty 51-100: Color fade mode 1 101-150: Color fade mode 2 151—200: Color fade mode 3 201—255: Sound
4	Function Speed	0-255, Slow-Fast Speed

7. DMX512 Channel(A2ch)

CH	Function	Details
1	Dimmer	0-255 Dark-Bright
2	Strobe	0-255 Slow-Fast

8. DMX512 Channel(b2ch)

CH	Function	Details
1	Warm Dimmer	000-255
2	White Dimmer	000-255

