



IMRELAX

广州市稻凯灯光有限公司

GUANGZHOU DAOKAI LIGHTING CO., LTD.

IMRELAX Brand Lighting

Tel: +86-020-36082937

Fax: +86-020-69036172

Email: sales@imrelax.com

Sales Complain:

imrelaxlighting@imrelax.com



IMRELAX

STAGE LIGHTING

MAJOR FROM IMRELAX



广州市稻凯灯光有限公司

GUANGZHOU DAOKAI LIGHTING CO., LTD.



IMRELAX



About us


Guangzhou Daokai Lighting Co., LTD. was founded in July 2010, our office and factory both are located in GuangZhou city, China.

As a professional manufacturer and exporter specialized in research, design and development of stage & LED lighting, we provide high quality products with lower price and outstanding customer service.

Our factory has 2 floors of manufacturing workshop, 12 production lines, 6 testing lines and 1 warehouse. All of our products comply with international quality & safety standards and have been being sold to all over the world.

IMRELAX is one of our most brands, our main products include: stage beam moving head light, wash moving head light, spot moving head light, LED par light, LED effect light, laser light, smoke machine, LED curtain, etc.

If you're interested in any of our products, or would like to discuss a custom order, please feel free to contact us, we're looking forward to forming successful business partnership with you.

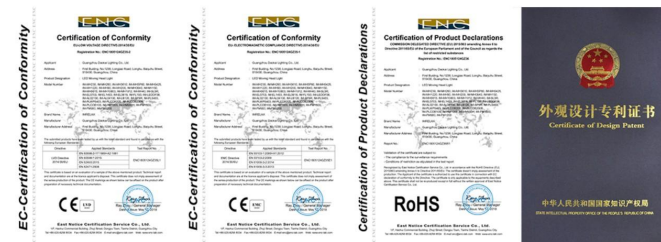

Directory

Moving Head Light Series

IM-MH230	5	IM-MH150W	18
IM-MH60S	6	IM-MH150B	19
IM-MH90S	7	IM-MH0610	20
IM-MH0425	8	IM-MH350	21
IM-MHN40	9	IM-MH3603	22
IM-ML0840	10	IM-MH24N1	23
IM-MH280	11	IM-MH0640	24
IM-MH150S	12	IM-MH60B	25
IM-MH1220	13	IM-MH260	26
IM-MH1915	14	IM-MH0410	27
IM-MH10803	15	IM-MHW0810	28
IM-MH350WP	16	IM-MH0432	29
IM-MH200M	17	IM-MH90	30
		IM-MH3615	31

Stage Effect Light Series

IM-LB120	32	IM-SP5R	40
IM-RL8H200MW	33	IM-EL1403	41
IM-EL0812	34	IM-EL0703	42
IM-WL6403	35	IM-SLRGBW1080	43
IM-EL0810	36	IM-SL5R	44
IM-SLE45	37	IM-MB0518	45
IM-PB1203	38	IM-EL4in1	46
IM-SLRGBW540	39		

Stage LED Par Light Series

IM-PLWP1215	47	IM-AL04100	51
IM-PLWP1815	47	IM-PL200Z	51
IM-LZPL200A	48	IM-AL02100	52
IM-COB30	48	IM-PLWP5403	52
IM-PL5403	49	IM-BTPL0418	53
IM-BTPL1218	49	IM-PLCOB200	53
IM-S4PAR	50	IM-PLCOB100	54
IM-PLWP1812Z	50	IM-PLCOB200B	54

Stage Fog Machine

IM-FM900	55	IM-FM1500	57
IM-FM1000B	55	IM-FM1500B	58
IM-HM900H	56	IM-FM1200A	58
IM-HM1000	56	IM-FM1200	59
IM-FM1500A	57		

Accessories

IM-MINI PEARL	60	IM-AC013	65
IM-SUNNY 512	60	IM-AC011	65
IM-DISCO240	61	IM-AC012	65
IM-AC006	61	IM-AC009	66
IM-UTDMX01	62	IM-AC008	66
IM-AC005	62	IM-AC010	66
IM-AC002	62	IM-AC024	67
IM-AC018	63	IM-AC021	67
IM-AC019	63	IM-AC023	68
IM-AC020	63	IM-AC020	68
IM-AC003	64	IM-AC025	69
IM-AC014	64	IM-AC022	69
IM-AC004	64		



Moving Head Light Series



I M R E L A X

Moving Head Light Series

Professional shaking head computer lights can be divided into 250W, 575W, 1200W and other varieties from the power consumption. Among them, 1200W is the main type of lamp for professional performance venues.



I M R E L A X

Double Prism Sharpy Beam 230W 7R Moving Head Light



Specifications:

Model Number:	IM-MH230
Power:	Power: 230W
Voltage:	AC90-260V,50/60Hz;
Lamp Source:	Osram bulb 7R 230W;
Control Mode:	DMX512/Maser/Auto/Sound;
DMX Channel:	16/20CH;
Pan scan:	540°(16bit) Electric correction;
Tilt scan:	270°(16bit) Electric correction;
Prism:	16 + 8 facet prism;
Display:	Touch Screen Display;
Color Wheel:	14 Color + White;
Gobos:	17 gobos + white;
Strobe:	13 t/s, free strobe and Pulse strobe;
G.W:	18KG/pc;
Size:	45X42X55CM/pc;

With Unique Design G-clamp, no need disassemble, no need screws!


Feature:

Double Prism (16 + 8 facet prism);
The latest mainboard;
Super fast and silent;

Package:

1 x Beam 230w 7R Moving Head Light
2 x G-clamp
1 x Power Cable
1 x DMX cable
1 x User Manual



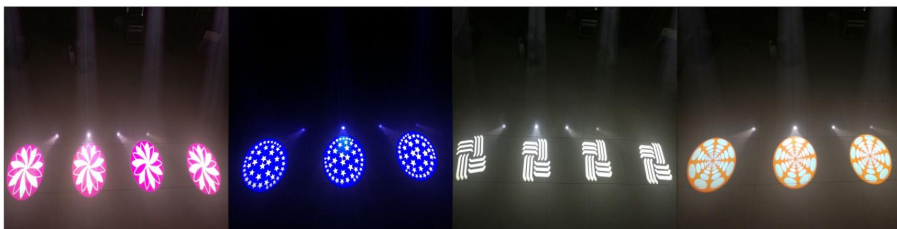

60W LED Spot Moving Head Light

Specifications:

Model Number:	IM-MH60S
Input power:	AC90-240V 50/60 Hz
Power consumption:	90W
LED Source:	60W White LED
Lamp life :	5000 hours lamp lifespan and low consumption
DMX channel:	4/15 channels
Color wheel:	7 colors+open, rainbow
Gobo wheel:	1 rotating gobo wheel, 7 glass gobos plus open
Prism:	3-facet prism
Beam angle: 13°	13°
Movement :	pan 540 degree , tilt 210 degree
Control mode:	Auto, Sound, DMX, Master/Slave
IR remote control:	optional
Display:	LCD display
Dimension:	195*190*290 mm
Weight:	4.5kg
Motorized focus	

Package:

1 x 60W LED Spot Moving Head Light
 1 x Hook
 1 x Power Cable
 1 x DMX Cable
 1 x User Manual
 Model Number:



90W LED Spot Moving Head Light



Specifications:

Model Number:	IM-MH90S
Light source:	1pcs 90W white LED
Dimmer:	Electronic dimmer 0~100%
Cooling:	Fan Cooling / Forced convection
Pan movement:	540°
Tilt movement:	270°
Pan/Tilt resolution:	8-16bit
Prism:	rotating 3-facet prism
Focus:	Electric linear focus from near to far
Power:	90W
1 fixed gobo wheel:	8 gobos and open
1 rotated gobo wheel:	6 gobos plus open, gobo rotating 360°
1 color wheel:	7colors and open white
Strobe:	0-16Hz, from slow to fast, adjusting
Control mode:	Auto run/Sound active/DMX512/ Master-Slave
DMX channel:	15 Channels
Display:	LCD display
Size:	270*190*390mm
Weight:	7KG





I M R E L A X



4*25W LED Super Beam Moving Head Light

Specifications:


Model Number:	IM-MH0425
Voltage:	AC90-240V 50-60Hz;
LED source:	4pcs high brightness 25W white LEDs;
Power:	130W;
Strobe:	1-25Hz/Second with various stroboscopic effects;
Dimmer:	16 bit dimming system, smoothly without strobe;
Pan:	540°+ fine
Tilt:	250°+ fine;
Color:	RGB, colorful and symmetrical, with running water effect;
DMX Channel:	9/15 DMX channels;
Control:	DMX512/Master-slave/Auto/Sound activated;
Size:	47x35x32cm/pc;
G.W:	9KG/pc.

Features:

- Strong beam light effect, beam angle is optional, beam light with macro effect.
- Each bulb is controllable, with racing light effect.
- Intelligent fan control system, temperature auto detect system.

Package:

1 x 4x25w LED Super Beam Moving Head Light
1 x Holder;
1 x Power Cable
1 x DMX cable;
1 x User Manual;

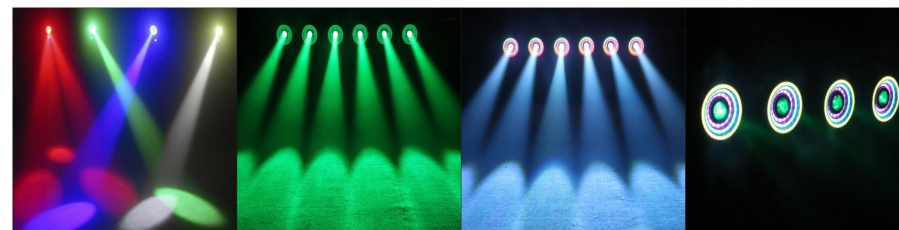

RGBW 4in1 LED Crazy Beam Wash Onion Moving Head Light

Specifications:

Model Number:	IM-MHN40
Voltage:	AC100-240V 50-60Hz.
Power Consumption:	P = 130W
light source:	1*40W RGBW 4in1 LED +76° 0.2W SMD-RGB.
DMX Channel:	14CH and 19CH.
Lumin: R:	9270 LUX@1M
G:	G:14370LUX@1M
B:	15900LUX@1M
W:	16420 LUX@1M
RGBW:	50000 LUX@1M
Fuse:	F3AL250V.
Display:	2.4 inch TFT
Net weight:	7.2kg
Size:	29.5*19.2*35.2cm
Four Operational Modes:	Sound (Audio) Active, Show Mode, DMX, Master /Slave;
40w beam angle:	8°
• Sound (Audio) Active, Show Mode, DMX, Master /Slave;	
• Unlimited rotation, X/Y 540 ° /205°	





IMRELAX

8*40W RGBW 4in1 LED Moving Head Flying Light

Specifications:

Model Number:	IM-ML0840
Voltage:	AC100-240V/50-60Hz
Power:	350W
Lamps:	8pcs 40W CREE RGBW 4in1 LEDs, Single LED can point control
LED life span:	80,000 hours
Lens degree:	Standard 40 degree
Color rotation system:	RGBW rotation , Marco color system
Strobe:	1-30 times/ second electronic strobe and random strobe
Dimmer:	0-100% linear electronic dimmer
Scanning system:	Pan540° ,Tilt360°
Control mode:	DMX512/Stand-alone mode/Voice
Channel model:	18CHs
Function effect:	Beam/RGBW automatically rendered by turns
Light Case:	Adopt ABS anti-fire plastic
Packing size:	595x395x500mm(2PCS/CTN)
N.W:	13Kg
G.W:	15Kg

- Display Menu: 2.4 inches touch screen, Touch control panel and buttons, Chinese and English two version language. Convenient and quick operation, and browse the menu panel display font can turn 180°, and suitable for flat or hang, Menu can be personalized Settings display Settings, via the menu editor and invoke the built-in Settings, can use time and glowing, channel, data recording device and software version information



IMRELAX

8*40W RGBW 4in1 LED Moving Head Flying Light

Specifications:


Model Number:	IM-MH280
Lamp:	280W (Color temperature: 9300K)
Channel mode:	16 / 24 DMX512 Channel
Pan scan:	540° (16bit) Electric correction
Tilt scan:	270° (16bit) Electric correction
Color wheel:	one color wheel, 13 kinds of color chips in one color wheel
Static Gobo:	14 gobos
Rotation Gobo:	9 gobos
Effect Wheel:	one Rotation eight prism, one Rotation six prism effect move, frost
beam angle:	beam angle: 3.8°-20°
Power Input:	90-240V, 50/60Hz
Power Dissipation:	420W
IP level:	IP20
Packing Size:	Packing Size: 450x430x570mm
G.W:	G.W: 20 KG

- Amazing dot matrix, four tact switch, 180° turning show
- 0-100% mechanical dimming, mechanical dimming and free dimming available.
- Strobe macro control available.
- Lens optical system mechanical focus
- Magnetic ballast and AC/DC power supply
- Over heat protection

Package:

- 1 x 280w Beam Spot Wash 3in1 Moving Head Light
- 2 x Hook
- 1 x Power Cable
- 1 x DMX Cable
- 1 x User Manual




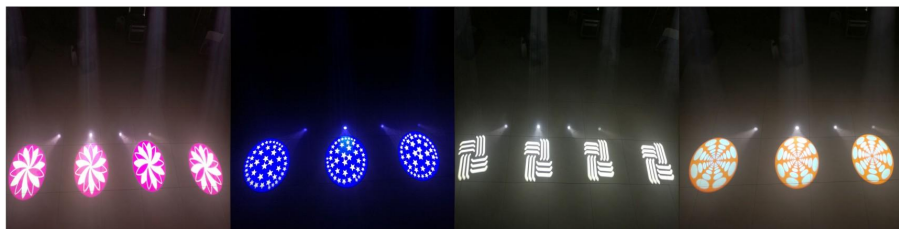

150W LED Spot Moving Head Light

Specifications:

Model Number:	IM-MH150S
Voltage:	AC100-240V, 50/60Hz
Light source:	high power 1*150W LED
Consumption power:	280W
LED lifespan:	60,000h
Color temperature:	7000K-8000K
Beam angle:	10°
Application:	any safe indoor
Display mode:	LCD display, light temperature display, reversible display
Control mode:	DMX512, master-slave, auto run, sound
DMX channel:	15CH
Color wheel:	8 color+white, rainbow effect, half color changed effect
Static gobo wheel:	8 fixed gobos+white, gobo shake, running water gobo
Rotating gobo wheel:	7 rotating gobos+white, gobo shake, running water gobo
Double prism wheels:	8-facet prism + 3-facet prism, prism rotation effect, frost effect, focus effect
X:	540° (16bit) electric correction
Y:	270° (16bit) electric correction
• Automatic XY correction:	abundant built-in program
Dimmer:	0-100% perfect linear dimmer system
Strobe:	synchronous pulsing strobe, random pulsing strobe
Protection rate:	IP20, use in door
Packing size:	410x320x500mm (1PC/CTN)
N.W:	13kg
G.W:	15kg
• Heat-proof plastic+module pressing alloy materials,	black/white color available for mass order



IMRELAX



12*20W LED Football Moving Head Light

Specifications:

Model Number:	IM-MH1220
Voltage:	90-240V, 50/60Hz;
Power:	300W
Light source:	12*20W High Power RGBW 4in1 LED;
DMX512 Channels:	21 DMX CHs;
Control mode:	DMX512/master-slave/sound/auto-run;
Dimmer:	0-100% linear dimmer;
Strobe:	white or four color strobe effect, from 1 to 12 flashes per second; or pulse pattern strobe;
Size:	38x30x49cm/pc;
G.W:	7.5KG/pc.

- X Pan forward and reverse positioning rotation, Y Tilt infinite rotation

Package:

- 1 x 12*20W LED Beam Moving Head Light
- 1 x Hook
- 1 x User Manual
- 1 x Power Cable
- 1 x DMX Cable





I M R E L A X

19*15W Osram RGBW 4in1 LED Moving Head Light

Specifications:

Model Number:	IM-MH1915
Consumption power:	300W
Used voltage:	AC100-240V_50/60Hz
Light source:	19pcs * 15W Osram high power RGBW 4in1 LEDs
Lamp lifespan:	100000h
Color temperature:	2700-8000K adjustable
Zoom angle:	5°- 60°
Color mixing:	RGBW, lots of mixing color
Working places:	any safe indoor
Strobe:	several strobe modes for choose, 32 time/second
Display modes:	LCD, English and Chinese language for choose, simple display operation
DMX512 Channel:	16/24 CH
Dimmer grade:	0-100% perfect linear dimmer system
XY:	540°/270°, automatic accurate location
Protection rating:	IP20, used indoor
Control modes:	DMX512, Master-slave, Auto-run and Sound control
Structure:	high temperature resistant & flame retardant engineering plastics +
Packing size:	die-casting aluminum body 480x315x395mm(1PC/CTN)
N.W:	10kg
G.W:	12kg
Wash+Zoom 2in1 function	



I M R E L A X

36x15w 5in1 LED Washer Moving Head Light

Specifications:

Model Number:	IM-MH10803
Power input:	AC100-240V 50/60HZ
Maximum power:	360W
Beam divergence angle:	25 degrees
DMX channel:	16 channel
Light source:	108PCS 3W LEDs (R30G30B30W18)
Control mode:	DMX512/Master-slave/Auto/Sound activated
Signal input / output:	3 needle Caron
Shell material:	plastic shell + aluminum plate
International standard control signal:	DMX512
Passages:	16 channels can be switched.
Motor number:	a total of 2 mute motors
Dimming:	0-100% linear adjustment.
Stroboscopic:	strobe speed (1-30 times / sec), full linear dimming and variable strobe speed.
Lamp size:	34X24X37.5CM
Package size:	42x30x39CM
Grade:	IP12
Net weight:	9.6KG
Gross weight:	11KG
<ul style="list-style-type: none"> The X axis is horizontally rotated at 540 degrees, and the Y axis is vertically rotated at 270 degrees. X, Y axis operation can adjust and adjust micro, software with correction positioning function, high precision! Superheat intelligent protection Intelligent dimming control (prolonging the service life of the lamp source) 	





Waterproof Sky Super Beam 350W 17R Moving Head Light

Specifications:

Model Number:	IM-MH350WP
Input Voltage:	AC90-240V, 50-60Hz
Power Consumption:	500W
Control By 4 Modes:	DMX 512, Master/Slave, Sound activity and work auto
Product Size:	490x404x722mm
Packing Size:	600x525x800mm (Carton)
Net Weight:	35kg
Gross Weight:	39kg

- 2000 Hours Lamp Life Span
- 540° pan and 240° tilt movement
- 16 bit smooth and precise resolution for PAN/TILT movement
- Scan position memory, auto X/Y reposition Correction
- 0 - 2.3° Beam Angle
- Fixed color wheel with 14 fixed Colors + Open
- Fixed Gobo wheel with 17 Gobos+Open
- 8-Facet Prism with Speed Adjustable and variable direction
- Mechanical shutter and adjustable speed strobe effect
- Linear Focus and Frost Filter
- 16/20 Channels Can be optional
- 2.1 Inch LCD Display
- IP55 Protection Rate
- IP55 Power Cable IN
- IP 55 DMX Cables IN/OUT



IMRELAX

200W LED Beam Spot Wash 3in1 Moving Head Light Plus ZOOM Feature



Specifications:

Model Number:	IM-MH200M
Voltage:	AC100-240V, 50-60Hz
Power:	300W
Led source:	200W White LED
Color Temperature:	7500K
Led Life Time:	Average 50000 Hours
Channel:	18 DMX channel
Control:	DMX/Master-slave/Auto/Sound activated
Pan:	540 degree + fine
Tilt:	270 degree + fine
Zoom(Beam) angle:	7-21°
Dimmer:	0-100% smooth linear dimmer
Strobe:	1-25 Hz with pulse effect
Color Wheel:	9 colors + open, with half color effect
Static Gobo Wheel:	9 gobos + open, with rotation and running water effect
Rotation gobo wheel:	7 gobos+open
Prism:	4 facet prism with bi-direction rotating
Frost:	With frost effect
Screen:	LCD screen with Chinese and English, can adjust 180 degree to fit different installation position
Size of Dimension:	343*239*537mm
Packing Dimension:	460*460*580mm(1PC/CTN)
Net Weight:	19kg
Gross Weight:	22kg

Feature:

- High Power Long lifespan 200w LED sources;
- Higher CRI(Color Rendering Index) than normal HID lamp bulb, clear gobo display;
- Energy saving and environmental protection;
- With Excellent Linear Zoom function.
- It's time to update your stage lighting for your show. :)



IMRELAX

150W 3in1 COB LED Wash Moving Head Light

Specifications:


Model Number:	IM-MH150W
Used voltage:	100V-240V,50/60Hz
Consumption power:	200W
Light source:	1*150W 3in1 COB LED lamp bead
LED life span:	50000 hours
Display:	LCD display
DMX channel:	10 channels
Control /Operate mode:	DMX512,Mater-Slave mode,Vocie Control mode,Auto mode
Color:	Infinitely mixed color,well-distributed and sterling color
Dimming:	0-100% linear LED dimming system
Strobe:	1-25times/second , LED close in a very second/strobe effect, adjustable speed
Main input:	powercon
Connection:	3 core XLR connector input and output
Features:	efficient and low-noise system




150W LED Beam Moving Head Light

Specifications:

Model Number:	IM-MH150B
Used voltage:	AC100-240V,50/60Hz
Light source:	1*150W high power LED
Consumption power:	280W
Lamp lifespan:	60,000h
Color temperature:	6800K
Lumens:	23,450lux@5m
Lumens:	6,340lux@10m
Beam angle:	2.2°
Working places:	any safe indoor
Display:	LCD, light temperature, up and down display
Control modes:	DMX512, Master-slave, Auto-run and Sound control
DMX512 Channel:	13 CH
Color wheel:	11 color+white, rainbow effect, half-color changeable effect
Static gobo wheel:	17 fixed gobos+white, gobo shake, running water gobo
Prism wheel:	8-facet prism, prism rotation effect
X:	540°(16bit) electric correction
Y:	270° (16bit) electric correction
Automatic XY correction:	abundant built-in program
Dimmer:	0-100% perfect linear dimmer system
Strobe:	synchronous pulsing strobe, random pulsing strobe
Protection rating:	IP20, used indoor
Structure:	high temperature resistant engineering, plastics + aluminum pedestal
Packing size:	400×360×510mm (1PC/CTN)
N.W:	13kg
G.W:	15kg



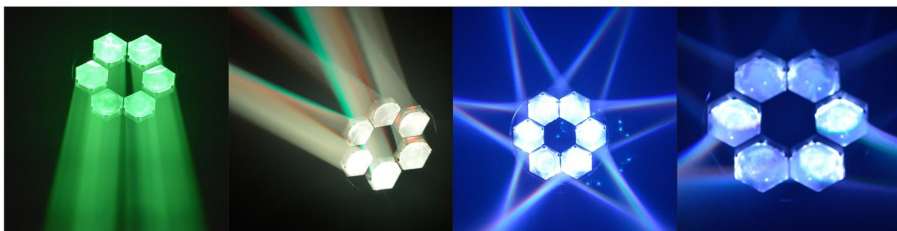

6x10W RGBW 4in1 LED Bee Eye Beam Moving Head Light

Specifications:

Model Number:	IM-MH0610
Channel:	2 Channels and 16 Channels
4 Operation Mode:	Sound test, Auto run, DMX and Master/slave
Voltage:	AC100-240V 50-60Hz
Fuse:	F3A L250V
Power Consumption:	P=80W
LED:	6pcs 10W RGBW 4in1 OSRAM LED
Plug:	Power in and Out
Size:	22*16*25cm
Weight:	4.7kg
LED display, easy to control	



350W 17R Beam Spot Wash 3in1 ZOOM Moving Head Light

Specifications:

Model Number:	IM-MH350
Voltage:	AC100-240V, 50/60Hz;
DMX Channel:	16/24CHs;
Control model:	DMX512/Maser/Auto/Sound;
Light Source:	YODN 17R lamp;
Color temperature:	8000K;
Optical lens:	High precision glued optical lens combination;
Focus:	Linear focus;
Zoom:	Linear zoom;
Dimmer:	0-100% linear dimmer;
Beam angle:	2-38 degree;
Strobe:	two-pieces plate strobe(0.5-9FPS);
Housing:	High temperature resistant alloy plastic;
IP Rate:	IP20;
Product size:	361×301×602mm;
Packing size:	480×480×590mm (1PC/CTN) ;
N.W:	18.6 kg;
G.W:	20 kg;
<ul style="list-style-type: none"> • LCD Display + Press button; • Display board intelligent flip function; • Super fast and ultra silence 3-phase step motors; • 13 Color with white, dual color effect; • 14 fixed gobo with open circle; • 9 changeable rotating three-dimensional gobo with white; • Any two-kinds prism stack can combine dynamic effect; • Positive and negative rotation switching effect; • 16pcs super silence motors, pan & tilt 3-phase step motors, 16bit; 	






36*3W RGBW Beam Wash Moving Head Light

Specifications:

Model Number:	IM-MH3603
Voltage:	AC100-240V.50-60hz
Power:	130W
Light source:	36*3W high quality LEDs
Dimming:	0% - 100% linear adjustment
Beam Angle:	20 degree beam angle
Pan:	540-degree
Tilt:	240-degree ,speed adjustable
Display:	LCD screen display
Life time:	50,000 hours lifespan and low power consumption
DMX channel:	9 / 16 DMX channels
Control:	DMX512
Packing size:	37cm*31cm*21cm
Packing weight:	7kg

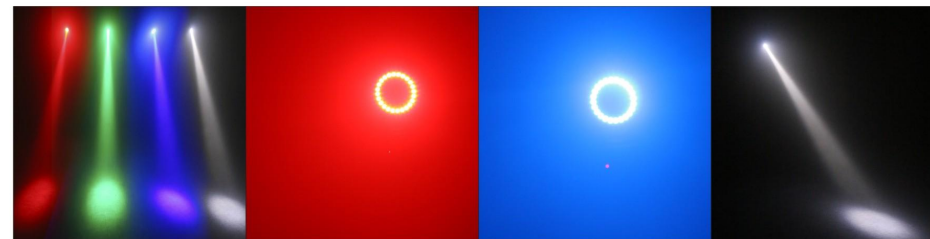

24 and 1 LED Beam Wash Moving Head Light

Specifications:

Model Number:	IM-MH24N1
Voltage:	AC100V-240V 50/60Hz
Power:	35W
Light source:	LED (15W RGBW *1pcs + 5050RGB*24pcs)
beam angle:	4° + 25°
Dimmer:	255 level linear dimmer
rotation angle:	Pan angle 540° Tilt angle 270°
Four operation mode:	Auto, sound active, DMX and Master/slave mode
Channel:	Addr512 (13CH)
Size:	238mm×193mm×295mm
Weight:	2.6kg





IMRELAX

6*40W RGBW LED Beam Zoom Wash 3in1 Moving Head Light

Specifications:

Model Number:	IM-MH0640
Input power:	AC100-240V 50/60 Hz
Power consumption:	255W
Power connection:	IEC-10A
Connection:	3pin-XLR male/female
Extremely Long Life:	50,000 Hr and low power consumption
LED:	6 Pcs 40W high-power RGBW LED
DMX channel:	10/17 channels
ZOOM angel:	4-36°
Movement:	Pan/Tilt: X axis 540°, Y axis 190°
Control mode:	DMX512/Master-Slave/Auto run/sound
Display:	2.4inches LCD display
IP-Rating:	IP20
N.W:	8.5KG
G.W:	11.5KG
Packing size:	44*36*32cm (1pcs/ctn);

- High speed of pan/tilt movement, speed of pan/tilt movement is adjustable
- 8 internal program, sound mode can control by DXM 512



Infinite LED 60W Beam Moving Head Light

Specifications:

Model Number:	IM-MH60B
Voltage:	90-240v, 50/60Hz
LED:	60W RGBW 4in1 LEDs
Power consumption:	130W
Beam angle:	5 degree
Pan:	540° or infinite rotate
Tilt:	360° or infinite rotate
Pan/tilt:	Pan/tilt inverts option
Strobe:	1-25times/sec or random strobe
Dimmer:	Variable electronic dimmer(0-100%)
Tiplot environment temperature:	104°F(40°C)
Display:	LCD Display Screen
Date input/output:	3pin XLR-connection, anode socket
Control mode:	DMX512/Master-Slave/Auto run/Sound Active
Size:	210x210x310mm
N.W:	4.6kg





Sharp Beam 260w 9R Moving Head Light

Specifications:

Model Number:	IM-MH260
Rated Voltage:	AC90-240V, 50/60Hz
Full Load Power:	260W
Light Source:	Philips 260 BULB
Dimming:	0~100% dimming
Strobe:	1-12times/per second
Design:	17 fixed pattern sheet+white
Features:	X540° Y270°(16bit)
Protection Class:	IP20
Beam angle:	Parallel beam angle 0-3.9°
DMX Channel:	16/20CH
Net Weight:	17.5kg

Feature:

Color:	14color + white;
Design:	17 fixed pattern sheet +white
Color temperature :	8500K;
Ballast:	Electronic ballast(Taiwan import);
Atomization :	0-100% atomization. dimming 0-100% linder control;

Package:

1 x 260w Beam 9R Moving Head Light
2 x Hook
1 x User Manual
1 x Power Cable
1 x DMX Cable



150W 3in1 COB LED Wash Moving Head Light

Specifications:

Model Number:	IM-MH0410
Voltage:	90-230v 50Hz-60Hz
Power consumption:	50W
LED:	4x10w (RGBW 4 in 1) LEDs
Pan:	540°
Tilt:	180°
Shuttle:	flash rate 0-10Hz
Dimmer:	0-100% mechanic dimmer
Display:	LCD display
Control mode:	DMX/Master-slave/Auto/Sound activated. (Pan/tilt invert option, Master /slave activated by sound at pre-programmed function)
Channel:	14/16 Channels
Tiption environment	
temperature:	104°F(40°C)
Data input/output:	3pin XLR-connection, anode socket
Product size:	210*135*230mm
N.W:	3kg






Sharpy Beam 260w 9R Moving Head Light

Specifications:

Model Number: IM-MHW0810
Channel: 10CH, 21CH
Four operation Mode: Sound test, Show mode, DMX and Master/slave.
Voltage: AC90-240V , 50/60Hz
Power consumption: P=94W
LED: 8*10W RGBW 4in1 CREE LED
Light size: 21.5 *12.5 *33.5cm
Net weight: 3.95kg
Lumen(1m) 11. Lumen(1m)
Built-in master-slave, sound control and show mode.
LED digital display, easy to control.
It's suitable for disco, club, bar, party and DJ moving show.

	1	2
R	14150Lux	17030Lux
G	29400Lux	32600Lux
B	46400Lux	48000Lux
W	41800Lux	42100Lux

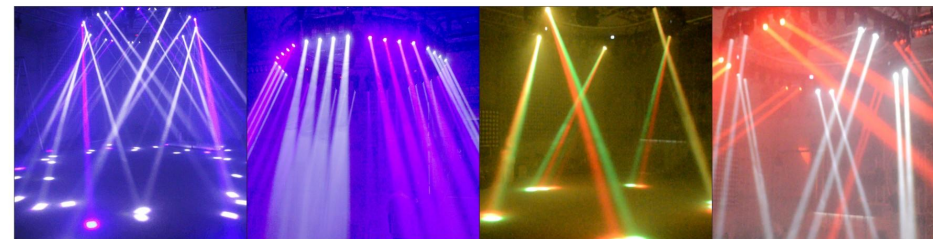

Sharpy Beam 260w 9R Moving Head Light

Specifications:

Model Number: IM-MH0432
DMX channel: 6CH, 10CH, 19CH, 32CH and 56CH
Control mode: Sound (audio) detection, Show mode, DMX and Master / slave
Voltage: AC100-240V 50/60Hz
Fuse: F3AL250V
Power consumption: P=200W
LED source: 4pcs 32W RGBW 4in1 LEDs
N)W): 11KG
Light size: 100*26*9CM
Light Lumens
Built-in master-slave, sound control and show mode
LCD display, easy to control
It's suitable for disco, club, bar, party and DJ moving show

color	1M	2M	Unit
R1	24000	11500	LUX
G1	5000	18000	
B1	8000	27000	
W1	6800	26000	





IMRELAX

90W LED Moving Head Light

Specifications:

Model Number:	IM-MH90
Input power:	AC100-240V 50/60 Hz
Power consumption :	120W
LED:	90W high power LED
DMX channel:	6/16 channels
Control mode:	DMX512/Master-Slave/Auto run
Display:	LCD display
Movement :	pan 540 degree , tilt 270 degree
Color wheel:	7 color + Open
Rotating gobo wheel :	6 gobos + open (interchangeable)
Static gobo wheel :	8 gobos + open
Prism:	3 facet prism
Focus:	Electronic linear focus
N.W:	7KG
G.W:	8 KG
Packing size:	43*32*24cm



IMRELAX

36x15w 5in1 LED Washer Moving Head Light

Specifications:

Model Number:	IM-MH3615
Voltage:	AC90-260V,50/60Hz;
Power:	400W;
Light source:	36pcsx*15W High Power RGBWA 5in1 LEDs;
Control Mode:	DMX512/Sound/Auto/Master-slave;
DMX Channel:	16CH;
Pan scan:	540°(16bit)Electric correction;
Tilt scan:	270°(16bit)Electric correction;
Strobe:	0-20 t/s,speed adjustable;
Zoom Funtion:	DMX 0-100% linearly adjustable zoom;
G.W:	13KG/pc;
Size: 4	42X33X46CM/pc.

Feature:

- Strong washer lighting effect, RGBWA colors available;
- With Zoom Function;
- RGBAW 5in1 LEDs

Package:

- 1 x 36x15w LED Washer Moving Head Light
- 1 x Holder;
- 1 x Power Cable
- 1 x DMX cable;
- 1 x User Manual;






Stage Effect Light Series



IMRELAX

Stage Effect Light Series

The stage effect light is a luminaire that is equipped with various effects for various dance music, rhythm sounds, etc. on the stage.

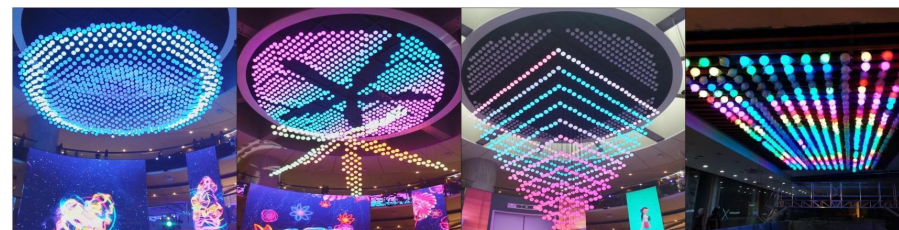

150W LED Spot Moving Head Light



Specifications:

Model Number:	IM-LB120
Voltage:	AC100v-240v/50-60 hz
Total power:	120 W
Light source:	3Wx12pcs LED
Color:	R, G, B linear infinite color options, can be linear transformation and colorful rainbow effect
Dimming:	0-100% linear dimming, has 16 bit precision fine-tuning
Stroboscopic:	pulse strobes, asynchronous stroboscopic synchronization. Stroboscopic speed 1-25 times per second
Hanging weight:	3 kg
Line length:	6 m (longest)
Speed:	1 meter per second (maximum)
Communication design:	DMX512, sound control, Auto run(led ball)
DMX512 channel modes:	10 ch
Lifting host:	35 x 29 x 16 cm, weight: 6.35 kg;
Ball:	25cm in diameter,
weight:	0.9 kg (Could select 25cm/30cm/35cm ball size)

Features:

1. LED type lifting ball has indoor use and waterproof type, widely used in the venue above do special effects with three-dimensional map, nightclubs, KTV.
2. The bottom ball body semi-transparent special plastic material, not easy to fracture, uv protection.
3. The ball USES high brightness LED lamp bead (R.G.B), wide Angle transmission, 360 ° full downy colour light.
4. The lifting system to the ball up and down, through DMX signal controller programming, according to the requirement to do different effect.
5. Lifts and ball independent packing, convenient installation.





I M R E L A X

200mW Red Laser 8 eyes Laser Beam Bar Light

Specifications:

Model Number:	IM-RL8H200MW
Item Type:	Stage Lighting Effect
Occasion:	Professional Stage & DJ
Style:	DMX Stage Light
Voltage:	AC110V/220V
Power:	100W
Product Name:	00mW Red Laser 8 eyes Laser Beam Bar Light
Control Mode:	DMX512/Sound/Auto/Master-slave
Light source:	8pcs 200mW Red Laser
Tiplot temperature:	40 degree
Data input/output:	3pin XLR-connection, anode socket
Channel:	6/14 DMX Channels
Strobe:	Variable electronic strobe
Dimmer:	electronic dimmer(0-100%)
Display:	LED digital display
Beam Laser Light:	Beam Laser Light:Red Color Great Effect Beam Laser Light




8*12W RGBW 4in1 LED Infinite Rotation Beam Moving Head Light

Specifications:

Model Number:	IM-EL0812
Voltage:	AC90-240v
Power:	200w
Frequency:	50-60Hz
Lamp source:	8*10w High Power RGBW 4in1 LEDs
Channel:	47CHs/31CHs/18CHs
Control mode:	DMX512/Sound/Auto/Master-slave
Horizontal scanning:	540 degrees / infinite rotation
Vertical scanning:	90 degrees
Strobe:	1-25 Times/Second or Random
Display screen:	LCD Display
Net Weight:	10kgs
Size:	48*48*32cm




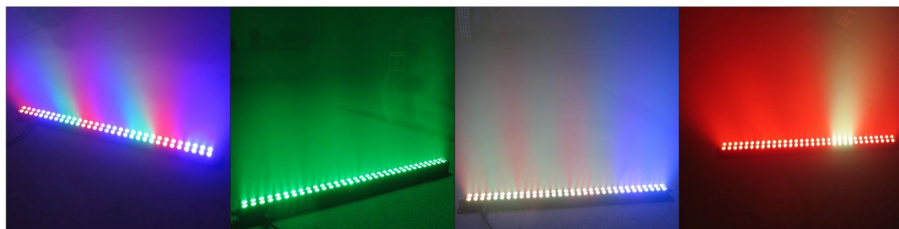

8*12W RGBW 4in1 LED Infinite Rotation Beam Moving Head Light

Specifications:

Model Number:	IM-WL6403
Voltage:	AC100/240V, 50/60Hz
Power consumption:	117w
Light source:	641) 1.5W RGB 3 IN 1 LED
Color mixing:	RGB
Beam angle:	45 degree
Strobe:	0-16Hz, from slow to fast, adjusting
Control mode:	Auto, Sound ,DMX512
DMX channels:	2/3/4/7/14/26
Data out/in:	3 pin XLR-connection sockets
Size:	1050*75*120mm
Net weight: 100%	3.5kg
LED digital display	
7) Electronic dimmer from 0 to 100%	



8*10W RGBW 8 Pixels 4in1 LED Beam Bar Moving Head Stage Light

Specifications:

Model Number:	IM-EL0810
Voltage:	100-240v, 50Hz-60Hz
Light source:	8x10w RGBW 4in1 LED
Tiplot temperature:	104°F(40°C)
Data input/output:	3pin XLR-connection, anode socket
Control Mode:	DMX512/Sound/Auto/Master-slave
Channel:	9CH/38CH DMX-512 in optional
Strobe:	Variable electronic strobe.
Dimmer:	electronic dimmer(0-100%).
Display:	LED digital display
Product size:	1070 x85x180mm
N.W:	7.5kg
Reset to factory settings option	





I M R E L A X



Two Heads Scan with Laser Effect Stage Disco Light

Specifications:

Model Number:	IM-SLE45
Channel:	1CH and 21CH
Four control modes:	Sound active, LED auto run, DMX and master/slave
Voltage:	AC100-240V 50/60Hz
Consumed power:	P=45W
Light source:	4pcs 1W White LED + 10pcs 3W R/G/B/W/A LED + Laser R=150MW, G= 50MW
Light size:	35X28X10cm
Weight:	3.05KG
Built-in master/slave and sound active modes, super show mode LED display, easy to control Suit for disco dance hall, club, bar, party, mobile DJ and so on	



I M R E L A X



LED laser 4 in 1 Stage Effect Light

Specifications:

Model Number:	IM-PB1203
Voltage:	AC100-240V, 50/60HZ
Light Source:	12*3W Warm White LED + 72pcs RGB 3in1 SMD LED
Work Power:	80W
Lifetime:	50,000hrs
Color:	Warm White + Full Color Background
Dimmer:	0-100% Electronic Linear Dimming
Strobe:	0-25HZ
DMX Channel:	6/9/84/89 DMX channels
Working Mode:	DMX512 / Auto Run / Sound Active / Master slave
Product Size:	94x8x14cm, N.W: 3.5kgs
8in1 Fly case:	160x50x50cm, GW: 57.5kgs





8*12W RGBW 4in1 LED Infinite Rotation Beam Moving Head Light

Specifications:

Model Number:	IM-SLRGBW540
Used voltage:	AC100V-240V,50/60Hz
Consumption power:	300W
Light source:	540*0.5W RGBW
Life span:	80000 hours
DMX channel:	6/9/21 channel
Control mode:	DMX512 mode,Stand-alone mode,Mater-Slave mode
Strobe:	0-25times/second
Product measurement:	470*170*170mm
N.W:	6Kg
G.W:	7Kg

Product feature:

- 4 subsection pattern can be used for daily soft light
- diversified strobe effect,16 bits dimmer
- vertical angle of the light can be adjusted by hand
- 0-25times/second,high speed strobe effect dispaly every second,with randomstrobe and impulse strobe



I M R E L A X

200w 5R Sniper 3in1 Laser Beam Light

Specifications:

Model Number:	IM-SP5R
Input power:	110-240V 50/60 Hz
Lamp: 5R , 200W	5R , 200W
Output Lamp power:	350W
Color temperature:	8,000 K
Color wheel:	one color wheel, 14 kinds of color chips in one color wheel
Mechanical dimmer:	linear dimming 0-100%
Channel mode :	15 and 21 DMX 512 control channels
Display:	LCD display
Body:	Aluminium structure with die-cast plastic cover
Packing Size:	45*41*37cm
N.W:	9.4KG
G.W:	10.4KG

- Discharge lamp with a short arc burner in a reflector system
- Interchangeable gobo wheel with 17 fixed gobos
- High speed shake effect,3-face rotating prism
- Mechanical shutter and adjustable speed strobe effect
- Magnetic ballast and AC/DC power supply

Package:

- 1 x 200w 5R Sniper 3in1 Laser Beam Light
- 1 x User Manual
- 1 x Power Cable
- 1 x DMX Cable





I M R E L A X

14*3w Warm White LED Linear Pixel Effect Light

Specifications:


Model Number:	IM-EL1403
Voltage:	AC100V-AC240V, 50/60Hz
Power:	50W
Light source:	14pcs 3W bright imported LEDs
Color:	2600K Warm white
DMX Channel:	7/14CHs;
Beam angle:	4 degree
Material:	iron metal
Strobe:	0-20 t/s, speed adjustable
Control Mode:	DMX512/Sound/Auto/Master-slave
Dimming:	0-100% electronic dimmer
G.W:	4KG/pc;
Size:	100x17x7cm

Features:

- High power brightness LEDs, energy-efficient
- Each LEDs individual control, do not limit your creativity
- light weight, easy to movement
- Power in & out, convenient to connect

Package:

- 1 x 14x3w Warm White LED Linear Pixel Effect Light
- 2 x Holder
- 1 x Power Cable
- 1 x DMX Cable
- 1 x User Manual



I M R E L A X

14*3w Warm White LED Linear Pixel Effect Light

Specifications:



Model Number:	IM-EL0703
Voltage:	AC100V-AC240V, 50/60Hz
Power:	25W
Light source:	7pcs 3W bright imported LEDs
Color:	2600K Warm white
DMX Channel:	7/14CHs;
Beam angle:	4 degree
Material:	iron metal
Strobe:	0-20 t/s, speed adjustable
Control Mode:	DMX512/Sound/Auto/Master-slave
Dimming:	0-100% electronic dimmer
G.W:	3KG/pc;
Size:	50x17x7cm

Features:

- High power brightness LEDs, energy-efficient
- Each LEDs individual control, do not limit your creativity
- light weight, easy to movement
- Power in & out, convenient to connect

Package:

- 1 x 7x3w Warm White LED Gold Pixel Effect Light
- 2 x Holder
- 1 x Power Cable
- 1 x DMX Cable
- 1 x User Manual





IMRELAX

1080pcs 0.5W RGBW LED Stage Strobe Light

Specifications:

Model Number:	IM-SLRGBW1080
Used voltage:	AC100V-240V, 50/60Hz
Consumption power:	600W
Light source:	1080*0.5W RGBW
Life span:	80000 hours
DMX channel:	3/5/12/18/20/26 channel
Control mode:	DMX512 mode/Stand-alone mode/Master-Slave mode
Strobe:	0-25times / second

Product feature:

- 4 subsection pattern can be used for daily soft light
- diversified strobe effect, 16 bits dimmer
- vertical angle of the light can be adjusted by hand
- 0-25times/second, high speed strobe effect display every second, with random strobe and impulse strobe



IMRELAX

200w 5R Rotate Roller Scanner Light

Specifications:

Model Number:	IM-SL5R
Voltage:	AC110V/220V, 50/60Hz
Light Source:	PHILIPS MSD Platinum 5R
Power:	300 Watts
Color:	13 colors + white
Pattern:	14 fixed gobos + white
Strobe:	1-20 times per second high speed strobe, speed adjustable
Control Mode:	DMX512/Master/Auto/Sound
Channel:	9 DMX CH
Display:	LCD digital display
G.W:	9KG/pc
Size:	57x37x35CM
Dimming	0-100% linear dimming
Power in and out	

Features:

- Super fast strobe lighting effect
- Colorful and cool strong beam lighting
- High power brand Philips MSD platinum 5R bulb
- Power in & out, convenient to connect

Package:

- 1 x 200w 5R Rotate Roller Scanner Light
- 1 x Holder
- 1 x Power Cable
- 1 x DMX Cable
- 1 x User Manual





15x18W RGBWA UV 6in1 Super LED Magic Ball Light

Specifications:

Model Number:	IM-MB0518
Channel:	3CH and 11CH
4 Operation Mode:	Sound test, Auto run, DMX and Master/slave
Voltage:	AC100-240V , 50/60Hz
Power Consumption:	P= 65W
LED:	5PCS 18W RGBWA+UV 6in1 LED
Fuse:	F3A L250V
Light size:	30*30*38cm
Weight:	4.1KG

- Built-in master-slave, sound control and show mode.
- LED display, easy to control
- It's suitable for disco, club, bar, party and DJ moving show.



LED laser 4 in 1 Stage Effect Light

Specifications:

Model Number:	IM-EL4in1
Voltage:	AC100-220V 50/60Hz;
Total power:	60W;
Structure:	LED display, 3 pin XLR-connection sockets
Control mode:	Auto/sound actived/DMX512
Channel:	16 Channels
Size:	42x21x19cm
Net weight:	3kg
Source:	6pcs*3W high brightness LEDs Electrodeless Sord;
laser:	red 100mw green 30mw;

- 20W high brightness Strobe
- 4pcs 3W RGBW gobo;





Stage LED Par Light Series



I M R E L A X

Stage LED Par Light Series

Par light English is a PAR lamp, the full name is "Parabolic Aluminum Reflector", which means that the light source is packaged in the reflector.

IM-PLWP1215

Waterproof 12*15w RGBWA 5in1 LED Par Light



- Voltage: AC100V - 240V, 50Hz/60Hz
- Power: 120W
- Control mode: Auto/Master-slave/DMX512
- DMX Channel: 6/10 DMX Channels
- Dimmer: Variable electronic dimmer(0-100%)
- Lens angle: 25
- IP class: IP65
- Max temperature: 104°F(40°C)
- Data input/output: 3pin XLR-connection, anode socket
- Lamp resource: 12pcs 15W RGBWA 5-in-1 LED
- Outside size: 270*220*280mm
- N.W: 5.2kg

IM-PLWP1815

Waterproof 18*15W RGBWA 5in1 LED Par Can Light

- Voltage: AC100V - 240V, 50Hz/60Hz
- Light source: 18pcs 15w RGBWA 5in1 LEDs
- Color: RGBWA color mixing.
- IP class: IP65
- Dimmer: Variable electronic dimmer(0-100%).
- Strobe: 0-16Hz
- Color:auto-running and color shade.
- Control Mode:DMX512/Auto/Sound/Master slave
- DMX channels: 8 DMX channels
- Life long is 50000 hours
- Max temperature: 104°F(40°C)
- Data input/output: 3pin XLR-connection, anode socket
- Cooled: convection
- Product size: 280*250*200mm
- Product net weight: 4.5kg





IM-LZPL200A

Electric ZOOM 200W LED Par Light



- Rated Voltage: AC100/240V, 50/60Hz
- Rated Power: 250W
- LED: 1x200w LED Lifetime: 50000 Hrs
- Color: Warm white
- Lens Angle: 15-60 Degree
- Dimmer: 0-100%
- Strobe: 0-25 Hz
- Control Modes: DMX, Master/Slave,
- DMX Channels: 4 Channels
- Optimal Projection Distance: 4-30 Meters
- Working Temperature: -25-40 Degrees Celsius
- Cooling: Free convection
- Protection Rating: IP20
- Over temperature protection
- Easy to control, Dimming without flicker, No jitter. Suitable for photography, Studio, television stations, etc.

IM-COB30

LED 30W COB Par Light with Optional Lens

- Voltage: AC100-240V 50/60Hz;
- Power: 30W;
- Lens: 25 degree / 90 degree Optional;
- Light Source: 1pc 30W COB RGB LED;
- Channel: 2CH, 3CH1, 3CH2, 6CH optional;
- Control mode: Sound active, Auto run, DMX and master/slave;
- Display: LED display;
- Size: 20*20*15cm;
- Weight: 1.5KG;



IM-PL5403

54*3w RGBW 4in1 LED Par Lights



- Power supply: AC90V-240V, 50/60Hz
- Power consumption: 200W
- Lamp: 54pcs 3W RGBW 4in1 LEDs
- Control mode: DMX512/Auto/Sound/Master slave
- Light angles: 25 degree
- Channel: 4/7 Channels
- Packing Carton size: 25*25*36cm
- G. W: 5KG/pc

IM-BTPL1218

Battery Power 12*18W RGBWA + UV LED Par Light with Phone App Control



- Power supply: AC110V-250V
- Frequency: 50-60Hz
- Power consumption: 120W
- Light source: 12pcs 18W high brightness 6 in 1 leds
- Lamp life: 100,000 hours
- LED angle: 25 degree
- Color: 16.7 million kinds of color change
- Control channels: 6/10 CH
- Control mode: Phone App/DMX512/Master/Slave /Auto/Sound active/Infrared control.
- Automatic model (by function button) : color change, color strobe, color dimmer, color gradual change/color jump change
- Display: LED Digital Display
- 12) Packing size: 290*195*300mm
- N.W: 4 kg
- G.W: 5 kg





IM-S4PAR

4pcs 30W RGB 3in1 COB LED Par Light Kit System

- Built-in master/slave and sound active modes, super show mode;
- LED display, easy to control;
- Suit for disco dance hall, club, bar, party, mobile DJ and so on;
- Channel: 1CH, 3CH, 7CH, 12CH and 16CH;
- 4 operation mode: Sound test, Auto run, Strobe, DMX control and Master/slave;
- Par led is hanging on the 2.5 meter lamp bracket, angle adjustable;
- Foot controller by manual;
- Voltage: AC100-240V, 50-60Hz;
- Power consumption: 100W;
- LED source: 4pcs RGB 3in1 COB 30W LED;
- The PAR Light with Optional Lens;
- Lens: 25 degree / 90 degree Optional.

IM-PLWP1812Z

Waterproof Zoom 18*12W RGBW 4in1 LED Par Light

- Voltage: AC100V -240V, 50Hz/60Hz
- Lamp resource: 18x12w RGBW 4-in-1 LEDs
- Zoom angle: 10°- 50°
- Data input/output: 3pin XLR-connection, anode socket
- Dimming: Variable electronic dimmer(0-100%)
- Strobe: 0-16 Hz
- Control mode: DMX512/Auto/Sound/Master slave
- DMX Channel: 5/8 DMX channels
- Waterproof rates: IP65
- Size: 320*240*330mm
- N.W: 9.7kg



IM-AL04100

4*100w COB LED Audience Lights



- Input power: AC100-240V 50HZ/60HZ
- Power consumption: 400W
- LED Source: 4pcs high power 100w COB LEDs
- Colors: White and warm white
- Light angle: 60 degree
- Color Temperature: 3000 - 5600K
- Channels: 8CH
- Material: Metal Aluminum
- Best projection distance: 15-30 meters
- Dimmer: linear dimming 0-100%
- Strobe: 0-25 times /sec
- Control mode: Auto, DMX, Master/Slave DMX
- Dimension: 43*27*42cm
- 14) Weight: 8.5kg

IM-PL200Z

Linear ZOOM 200W COB LED Par Light

- Power supply: AC90V-240V, 50/60Hz;
- Power consumption: 200W;
- Light Source: 3200K 200W Warm White LEDs;
- Control Signal: 3 DMX CHs;
- Control Mode: DMX512/Auto/Sound/Master slave;
- Lighting Angle: 15 to 50 degree;
- Dimmer: 0-100% electric dimmer;
- Strobe: 1-25 times/s high speed strobe;
- Display: LED control panel;
- Weight: 4.5 KGs;
- Size 28*28*49cm
- Easy to control, Dimming without flicker, No jitter. Suitable for photography, television stations, etc.





IM-AL02100

2*100w COB LED Audience Lights



- Input power: AC100-240V 50HZ/60HZ
- Power consumption: 250W
- LED Source: 2pcs high power 100w COB LEDs
- Colors: White and warm white
- Light angle: 75 degree
- Color Temperature: 3000 - 5600K
- Control mode: DMX/Master-slave/Auto/Sound activated; Channels: 7CH
- Material: Metal Aluminum
- Best projection distance: 15-30 meters
- Dimmer: linear dimming 0-100%
- Strobe: 0-25 times /sec
- With Anti Glare Lens
- Dimension: 28*20*19cm
- Weight: 6kg

IM-PLWP5403

Waterproof 54x3w RGBW LED Par Lights



- Power supply: AC90V-240V, 50/60Hz
- Power consumption: 200W
- Lamp: 54pcs 3W RGBW LEDs
- Control mode: DMX512/Auto/Sound/Master slave
- Light angles: 25/45 degree
- Channel: 4/7 Channels
- Packing Carton size: 25*25*36cm
- G. W: 5KG/pc

Features:

- Brightness RGBW LEDs
- IP68 waterproof outdoor using
- Support light connect together



IM--BTPL0418

Battery 4*18W RGBWA



- Power supply: AC110V-250V
- Frequency: 50-60Hz
- Power consumption: 80W
- Light source: 4pcs 18W high brightness 6 in 1 leds
- Lamp life: 100,000 hours
- LED angle: 25 degree
- Color: 16.7 million kinds of color change
- 8) Control channels: 6/10 CH
- Control mode: Phone App/DMX512/Master /Slave/Auto/Sound active/Infrared control.
- Automatic model (by function button) :
- color change, color strobe, color dimmer,
- color gradual change/color jump change
- Display: LCD Screen Display
- Packing size: 138*145*184mm
- N.W: 3.2kg
- G.W: 3.5kg

IM-PLCOB200

High Power 200w White & Warm White COB LED Par Light with Cover



- Power supply: AC90V-240V, 50/60Hz
- Power consumption: 230W
- Light Source: 200w white and warm white 2in1 LEDs
- Control Signal: 2/4/6 DMX CHs
- Control Mode: DMX512/Auto/Sound /Master slave
- Colors: White and Warm White
- Dimmer: 0-100% electric dimmer, single color or mixed colors
- Strobe: 1-25 times/s high speed strobe, single color or mixed colors
- Display: LED control panel
- Packing Carton size: 25*25*36cm
- G. W: 5KG/pc





IM-PLCOB100

High Power 100w White & Warm White COB LED Par Light

- Power supply: AC90V-240V, 50/60Hz
- Power consumption: 100W
- Control Signal: 4CH DMX512
- Control Mode: DMX512/Auto /Sound/Master slave
- Colors: White and Warm White
- Dimmer: 0-100% electric dimmer, single color or mixed colors
- Strobe: 1-25 times/s high speed strobe, single color or mixed colors
- Display: LED control panel Red
- Packing Carton size: 25*25*36cm
- G. W: 5KG/pc

IM-PLCOB200B

High Power 200w White & Warm White COB LED Par Light

- Power supply: AC90V-240V, 50/60Hz
- Power consumption: 230W
- Light Source: 200w white and warm white 2in1 LEDs
- Control Signal: 2/4/6 DMX CHs
- Control Mode: DMX512/Auto/Sound /Master slave
- Colors: White and Warm White
- Dimmer: 0-100% electric dimmer, single color or mixed colors
- Strobe: 1-25 times/s high speed strobe, single color or mixed colors
- Display: LED control panel
- Packing Carton size: 25*25*36cm
- G. W: 5KG/pc



Stage Fog Machine



I M R E L A X

Stage Fog Machine

Stage fog machines used for celebrations, weddings, entertainment venues, performances, etc. to achieve a good dance effect.

Ld-1200w features:



IM-FM900


900w Remote Control Blue LEDs Smoke Machine

- Power supply: AC110V/220V, 50/60Hz
- Power consumption: 900W
- Light Source: 36PCS Blue LEDs
- Pre-heating time: 8mins
- Smoke output: 1500cuft/min
- Tank capacity: 1.5L
- Control: Wireless Remote Control/ Wire Control
- G.W: 3.5kg
- Packing size: 35x26x19.5cm

IM-FM1000B

Blue LEDs 1000w Remote Control Smoke Machine

- Power supply: AC110V/AC220V, 50/60Hz
- Power: 1000W
- Light source: 6pcs Blue LEDs
- Pre-heating time: 8mins
- Smoke output: 1500cuft/min
- Tank capacity: 2L
- Controller: Wireless Control/ Wire Control
- G.W: 5kg
- Packing size: 41x27x20cm

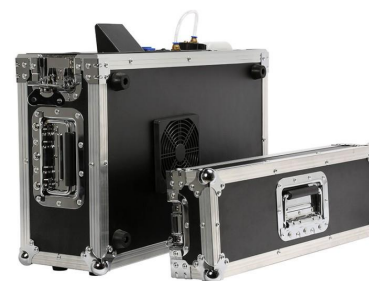

IM-HM900H

900W Mist Haze Machine

- Voltage: AC110V/220V, 50/60Hz
- Fuse: 8A/250V
- Power: 900 W
- Pre-heating: 2 Mins
- Smoke output: 3500 cuft/min
- Tank capacity: 3.5 L
- Oil consumption: 100MIN/L
- Controller: LCD-3 controller/ DMX512
- DMX channel: 3 channels
- Packing size: 57x21x48cm
- G.W: 17.5 kg

IM-HM1000

1000w Professional Haze Machine

- Voltage used: AC110v/220V, 50/60Hz
- Power: 1000W
- Fuse: 5A/250V
- Pre-heating time: 0 min
- Smoke output: 3500 cuft/min
- Tank capacity: 2.5L
- Oil consumption: 24h/L
- Control: LCD control/DMX control
- DMX Channel: 2 channels
- Packing size: 52x39x36cm
- G.W: 34kg





IM-FM1500A

1500w RGB 3in1 LEDs Smoke Machine

- Voltage used: AC110V/220V, 50/60Hz ;
- Color: 24PCS RGB LEDs;
- Power: 1500W ;
- Pre-heating time: 5Mins ;
- Smoke output: 4000cuft/min ;
- Tank capacity: 2.5L ;
- Oil consumption rate: 8min/L;
- Oil-free protection: Support ;
- DMX CHs:9 DMX Channel ;
- Control: Wireless Remote/DMX512 control;
- Packing size:49x 36x 20cm/pc;
- G W:9kg/pc;

IM-FM1500

RGB 3in1 LEDs 1500w Pyro Vertical Stage Fog Machine

- Power supply: AC110V/220V, 50/60Hz
- Power: 1500W
- Light source: 24PCS RGB LEDs
- Pre-heating time: 8mins
- Smoke output: 4000cuft/min
- Tank capacity: 2.5L
- Controller: Wireless control/DMX control
- Oil-free protection: Support
- Channel: 9 DMX Channel
- G.W: 7KG/pc
- Size: 51x40x27cm/pc



IM-FM1500B

1500w Pyro Vertical Smoke Machine

- Voltage used: AC110V/220V, 50/60Hz ;
- Power: 1500W ;
- Pre-heating time: 4Mins ;
- Smoke output: 4000cuft/min ;
- Tank capacity: 2.5L ;
- Oil consumption rate: 8min/L;
- Oil-free protection: Support ;
- Control: Wire control;
- Packing size:49x 36x 20cm/pc;
- G. W. : 9kg/pc;

IM-FM1200A

RGB 3in1 LEDs 1200w Smoke Machine



- Voltage used: AC110V/220V, 50/60Hz
- Power: 1200W
- LED: 9PCS RGB LEDs
- Pre-heating time: 8min
- Smoke coverage: 2000cuft/min
- Tank capacity: 2.5L
- Output Distance: 8m
- Control mode: Wireless Remote/Wire Control/DMX5
- DMX Channel: 1 DMX Channel
- G W:9KG/pc
- Size:55x31x27cm/pc





IM-FM1200

RGB 3in1 LEDs 1200w Stage Fog Machine

- Power supply: AC100V/220V, 50/60Hz
- Power: 1200W
- Light source: 9PCS RGB LEDs
- Pre-heating time: 8mins
- Smoke output: 2000cuft/min
- Tank capacity: 2L
- Controller: Wireless control/DMX control
- Oil-free protection: Support
- Channels: 9 DMX Channel

Guangzhou Daokai Lighting Co., LTD.



Accessories



I M R E L A X

Accessories



IM-MINI PEARL

Professional 1024 Channels Mini Pearl DMX Console

1024 DMX controller can control up to 96 fixtures. It is compatible with the library in Avolite Pearl R20 format and featured with built-in shape effects of pan/tilt circle, RGB rainbow, beam dimming wave, etc. 10 scenes and 5 built-in shapes can be output simultaneously. Sliders can be used to output scenes and adjust the intensity of the dimmer channels in the scenes.

IM-SUNNY 512

New Sunny 512 Scanner DMX Console

1024 DMX controller can control up to 96 fixtures. It is compatible with the library in Avolite Pearl R20 format and featured with built-in shape effects of pan/tilt circle, RGB rainbow, beam dimming wave, etc. 10 scenes and 5 built-in shapes can be output simultaneously. Sliders can be used to output scenes and adjust the intensity of the dimmer channels in the scenes.



IM-DISCO240

LCD Screen Disco 240 DMX Controller

- Output signal specifications: DMX512 international standard
- Total number of channels: 240 Road
- Number of scanners: 24 scanner
- Max. number of channels for the scanner 8
- Number of chases(scenes): 24 chase
- Maximal number of chase steps(scene): 40 steps
- Total number of chase steps(scene): 480 steps
- Scene pause time: 0.1-25.5 second/step
- Scene cross speed: 0.1-25.5 seconds
- Dimmer channel: 24 channels
- Display screen LCD display, 16x2 characters
- DMX512 outputs interface: 3-core XLR pin socket and socket
- Memory capacity: 128 K high capacity memory card
- Input voltage: AC 90~240v, 50 / 60HZ.
- Size: 483mmx178mmx80mm

IM-AC006

8 Output Ports DMX512 Signal Distribution Amplifier

DMX-8 Splitter is a DMX512 distribution amplifier. It is specially designed for connection of DMX receivers(dimers, color changers, moving lights, etc.) in a star configuration. DMX-8 can surmount the restriction that single RS485 can only connect 32 sets of equipment. The multiple output optically isolated DMX512 distribution amplifiers have become necessary in many DMX512 systems.





IM-UTDMX01

USB to DMX Interface Adapter

It can be widely on windows XP, Vista, windows7, windows 8, windows 10 (32bit and 64bit). And it is easy to install since there is a CD with drivers, Freestyle software, installation video in.

IM-AC005

10pcs 80cm Stage Light Safety Cables

High quality 80cm Safety Cables for Stage Lights/Fog Machines Steel Material with PVC cover Safety and durable

Package:

10 x 80cm Safety Cables



IM-AC002

Wireless DMX Transmitter and Receiver



- Tricolor LED displaying
- 126 channels automatically jumping frequency, high anti-jamming ability to ensure working reliability.
- 7 groups ID code settable, user can use 7 groups individual wireless system without any interference with each other in the same place.
- Input voltage: 5VDC 500mA MIN
- Communication distance: 1000 Meter
- Work frequency section: 2.4GHz ISM band, 126 channels frequency section.
- Max transmitting power rate: 23dBm
- Receiver sensitive: -94dBm
- Signal port: 3 pin male plug (for transmitter) & female plug (for receiver)



3.25ft (1 Meter)

IM-AC018

10pcs 3.25 feet / 1 Meter DMX Cable

- High quality 3 pin male to female stage light cable for DMX signal transmission
- Designed for accurate transmission of digital audio and DMX lighting control data
- Safety, shielding, and prevent transmission interferences
- Connect stage lights that will be great for parties, weddings, and any type of festival occasion
- Suitable for various products of stage light: moving head light, par light, spotlight with XLR input & output

Package:

10 x DMX Cable

IM-AC019

10pcs 3.25 feet / 1 Meter DMX Cable

- High quality 3 pin male to female stage light cable for DMX signal transmission
- Designed for accurate transmission of digital audio and DMX lighting control data
- Safety, shielding, and prevent transmission interferences
- Connect stage lights that will be great for parties, weddings, and any type of festival occasion
- Suitable for various products of stage light: moving head light, par light, spotlight with XLR input & output

Specification:

- Color: black
- DMX Cable Plugs Material: Plastic
- Connectors: Male and Female
- Length: 6.5 feet / 2 Meter
- Nominal Characteristic Impedance: 110 Ohms



6.5ft (2 Meter)

IM-AC020

10pcs 10 feet / 3 Meter DMX Cable

- High quality 3 pin male to female stage light cable for DMX signal transmission
- Designed for accurate transmission of digital audio and DMX lighting control data
- Safety, shielding, and prevent transmission interferences
- Connect stage lights that will be great for parties, weddings, and any type of festival occasion
- Suitable for various products of stage light: moving head light, par light, spotlight with XLR input & output

Specification:

- Color: black
- DMX Cable Plugs Material: Plastic
- Connectors: Male and Female
- Length: 10 feet / 3 Meter
- Nominal Characteristic Impedance: 110 Ohms





IM-AC003

MSD Platinum Beam 230 7R Light Bulb

- High quality Osram Beam 230w 7R Light Bulb
- For Beam 230W 7R Moving Head Light Assembly
- 6 Months or 3000 hours Warranty
- Color: as photo

IM-AC014

Safety Stage Light Clamp

- Color: original
- Material: Aluminum
- Width: 30mm
- Suitable: All kind of stage lighting products, especially for stage beam light products




IM-AC004

Beam 230w 7R Light Bulb Mainboard

- High quality Osram Beam 230w 7R Light Bulb Mainboard
- For Beam 230W 7R Moving Head Light Assembly
- 2 Years Warranty
- Color: as photo

Notes:

This price is for "China Post Air Mail" shipping, normally it will take 20 -35 days arrived. If you are urgent to get the bulbs, please feel free to contact us to get the DHL/UPS/TNT/FEDEX express shipping price. Thankyou.



IM-AC013

Safety Stage Light Clamp

- Color: original
- Material: Aluminum
- Width: 30mm
- Suitable: All kind of stage lighting products, especially for stage beam light products

Package:

- 1 x Safety Stage Light Clamp

IM-AC011

Safety Stage Light Clamp

- Color: original
- Material: Aluminum
- Width: 40mm
- Suitable: All kind of stage lighting products, especially for stage beam light products

Specification:

- Color: original
- Material: Aluminum
- Width: 40mm
- Suitable: All kind of stage lighting products, especially for stage beam light products



IM-AC012

Safety Stage Light Clamp

- Color: original
- Material: Aluminum
- Width: 30mm
- Suitable: All kind of stage lighting products, especially for stage beam light products

Package:

- 1 x Safety Stage Light Clamp





IM-AC009

25pcs Grey PowerCon Plug Connector

- Color: Grey
- PowerCon Plug Material: Flame Retardant Plastic
- Connectors: Female

Package:

- 25 x Female PowerCon Plug Connectors

IM-AC008

20pcs Blue PowerCon Plug Connector

- Color: blue
- PowerCon Plug Material: Flame Retardant Plastic
- Connectors: Male

Package:

- 20 x PowerCon Plug Connectors



IM-AC010

25pcs Blue PowerCon Plug Connector

- Color: Blue
- PowerCon Plug Material: Flame Retardant Plastic
- Connectors: Female

Package:

- 25 x Female PowerCon Plug Connectors



IM-AC024

2in1 Flight Case Package for IM-MH200M



Product Name: 2in1 Flight Case Package for IM-MH200M
Flight Case loading quantity: 2 pieces lights

- We provide the flight case package service for all IMRELAX products. If you need the flight case package, please feel free to send message to us, we will calculate the flight case package cost for you.
- Please note: Considering the flight case shipping price is high, so we will not sell the flight case separately. So please send inquiry before place order.
- Thanks for your understanding and appreciate to your cooperation. :)

IM-AC021

2in1 Flight Case Package for IM-MH0425



Product Name: 2in1 Flight Case Package for IM-MH0425
Flight Case loading quantity: 2 pieces lights

IM-AC023

4in1 Flight Case Package for IM-MH0425 Moving Head Light



4in1 Flight Case Package for IM-MH0425 Moving Head Light
Flight Case loading quantity: 4 pieces lights

- We provide the flight case package service for all IMRELAX products. If you need the flight case package, please feel free to send message to us, we will calculate the flight case package cost for you.
- Please note: Considering the flight case shipping price is high, so we will not sell the flight case separately. So please send inquiry before place order.
- Thanks for your understanding and appreciate to your cooperation. :)

IM-AC020

2in1 Flight Case Package for IM-MH230 Beam 230W 7R



2in1 Flight Case Package for IM-MH230 Beam 230W 7R
Flight Case loading quantity: 2 pieces lights

IM-AC025

8in1 Flight Case Package for IM-PLWP5403



Product Name: 8in1 Flight Case Package for IM-PLWP5403
Flight Case loading quantity: 8 pieces lights

- We provide the flight case package service for all IMRELAX products. If you need the flight case package, please feel free to send message to us, we will calculate the flight case package cost for you.
- Please note: Considering the flight case shipping price is high, so we will not sell the flight case separately. So please send inquiry before place order.
- Thanks for your understanding and appreciate to your cooperation. :)

IM-AC022

1in1 Flight Case Package Suitable for IM-MH200M



1in1 Flight Case Package Suitable for IM-MH200M
Flight Case loading quantity: 1 piece light